


ENERGIZER A23

Miniature



Industry Standard Dimensions

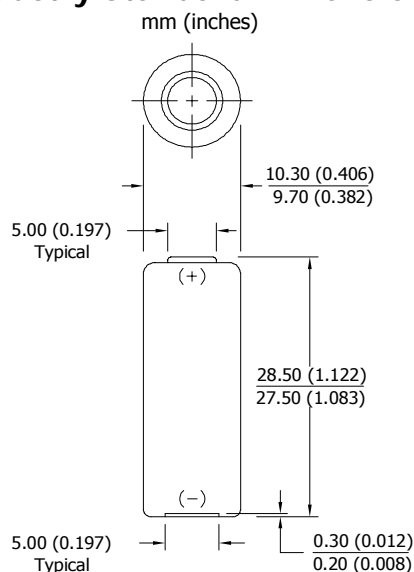

Designed for electronic applications
which may require high rate pulses.

Specifications

Classification:	"Miniature Alkaline"
Chemical System:	Manganese Dioxide (MnO_2)
Designation:	ANSI-1181A
Nominal Voltage:	12.0 volts
Typical Capacity:	65 mAh to 6.0 volts (rated at 20k ohms at 21°C)
Typical Weight:	8.0 grams (0.3 oz)
Typical Volume:	1.1 cubic centimeters (0.07 cubic inch)


Typical Discharge Durations

21°C (70°F)

Schedule (time)	Drain (mA)	Load (ohms)	Cutoff Voltage		
			8.8V (hours)	7.2V (hours)	6.0V (hours)
Continuous	0.48	20K	95	123	135


Discharge Characteristics

Schedule: Continuous
Typical Load: 20 K Ω (21°C)

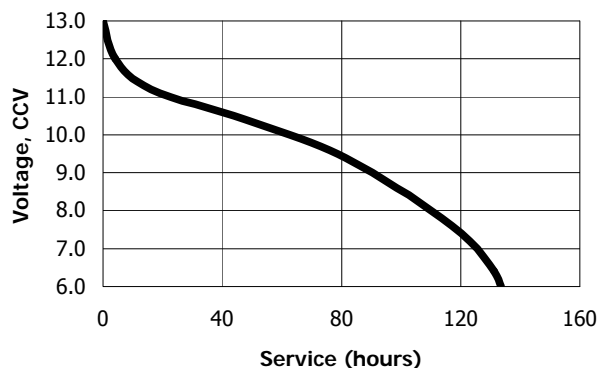

Temperature Characteristics

Schedule: Continuous
Typical Load: 20 K Ω

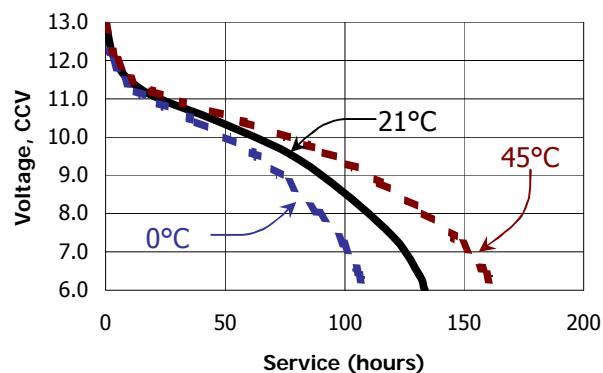

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.