



COSMO FERRITES LTD.

Material Specifications

CF195A

MATERIAL DATA SHEET



Material Specification : CF195A



Semic Trade, s.r.o., Volutová 2521/18, 158 00 Praha 5
Telephone: +420 251 625 331, 251 625 332, 251 625 377
GSM: +420 605 999 994 Fax: +420 251 626 252, 251 626 393



www.semic.cz
semic@semic.cz









Application	Broadband Transformers
Material	Mn-Zn

Material Properties	Conditions	Symbol	Value	Unit
Initial Permeability	25°C, 10kHz, ≤ 0.25mT	μ_i	5000 ±20%	
Flux Density	25°C; 10kHz; 1200A/m	B_s	460	mT
	100°C; 10kHz; 1200A/m	B_s	320	mT
Coercive Field Strength	25°C; 10kHz	H_c	12	A/m
	100°C; 10kHz	H_c	11	A/m
Hysteresis Material Constant	25°C;	η_B	< 1.1	10 ⁻⁶ mT
Curie Temperature	10kHz; ≤0.25mT	T_c	> 120	°C
Density	25°C	ρ	4.8 ×10 ³	kg/m ³
Resistivity	25°C	ρ_{DC}	0.3	Ωm
Relative Core Loss Factor	25°C; 10 kHz, 0.25mT	$\tan \delta/\mu_i$	≤ 1.5	*10 ⁻⁶
	25°C; 200 kHz, 0.25mT	$\tan \delta/\mu_i$	≤ 25.0	*10 ⁻⁶

Date: 20 May 2018

*Material data specified here have been derived from measurement on toroid core T2512

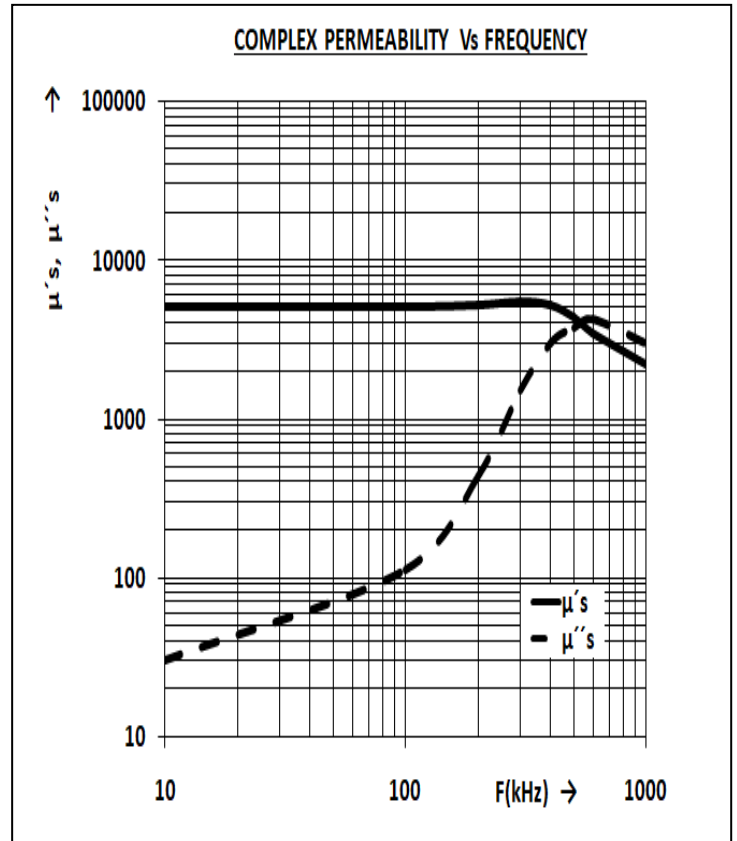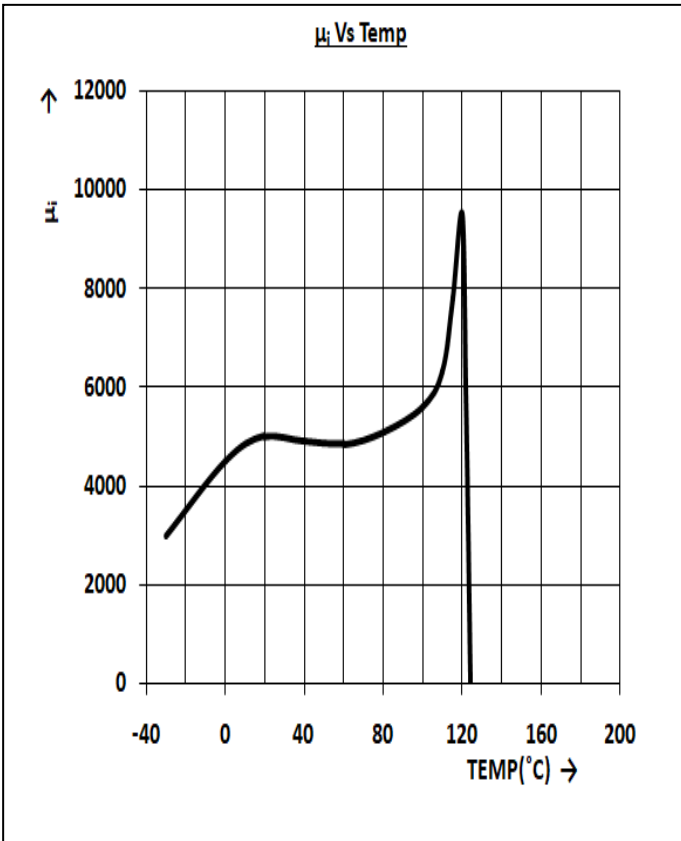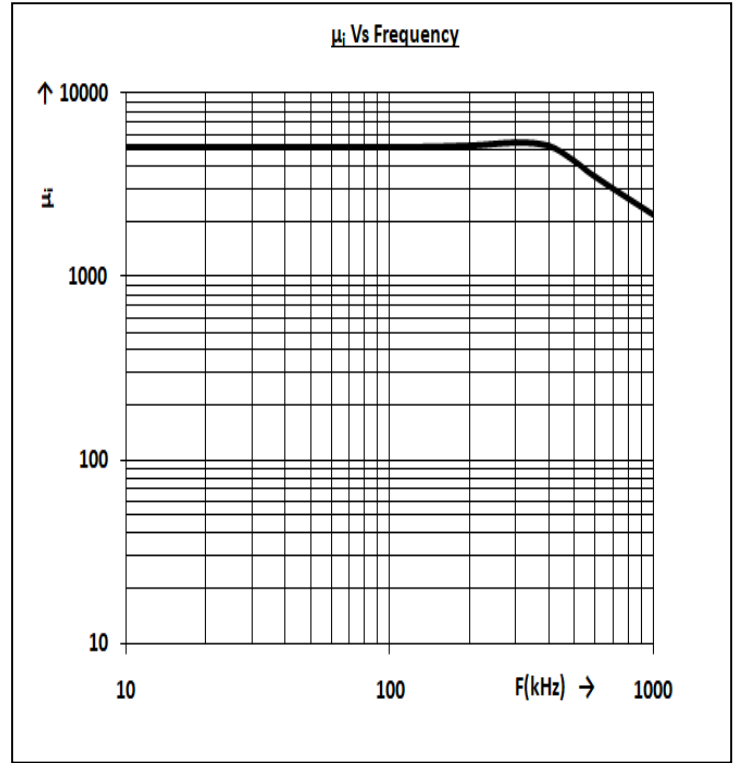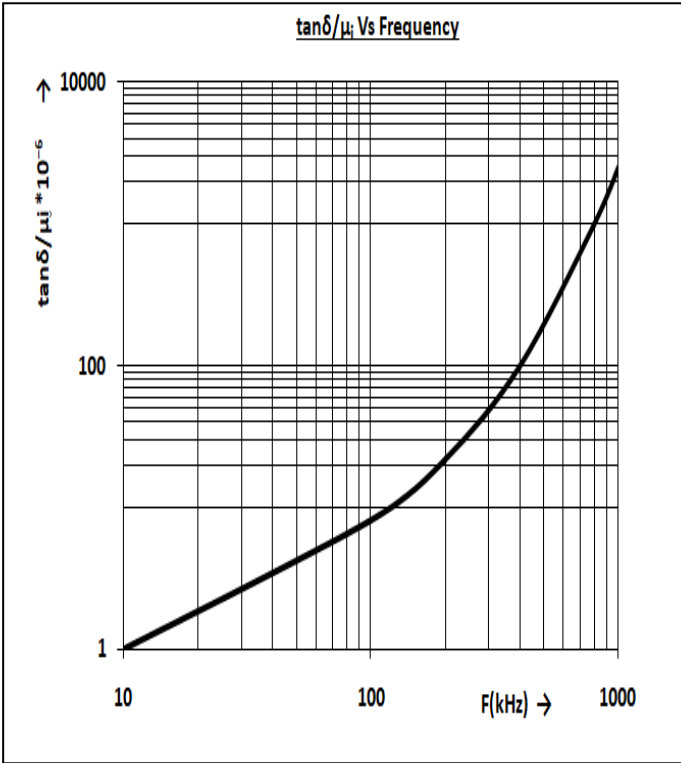

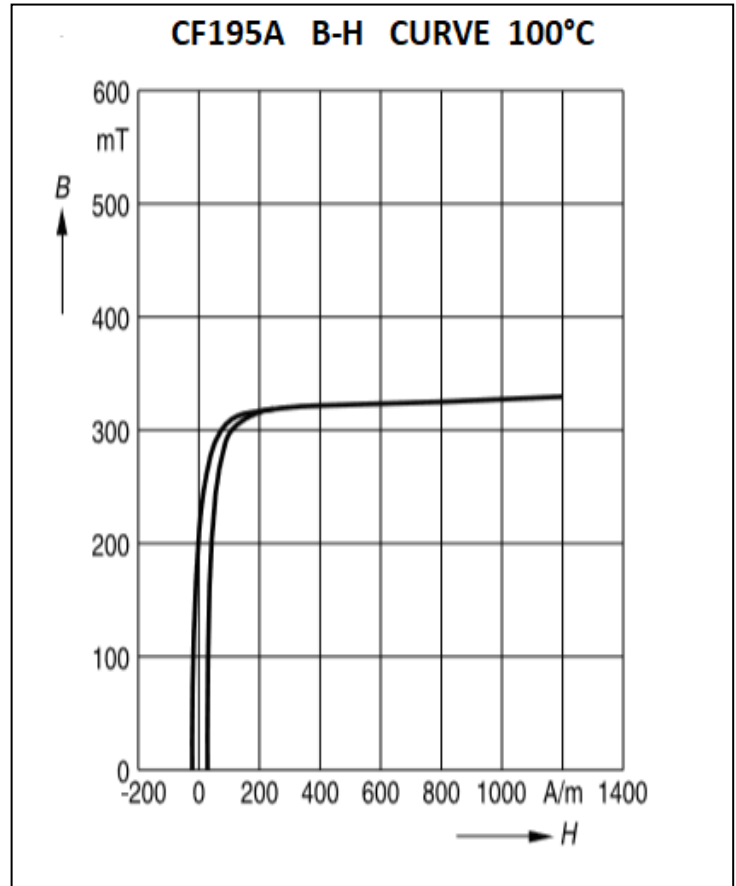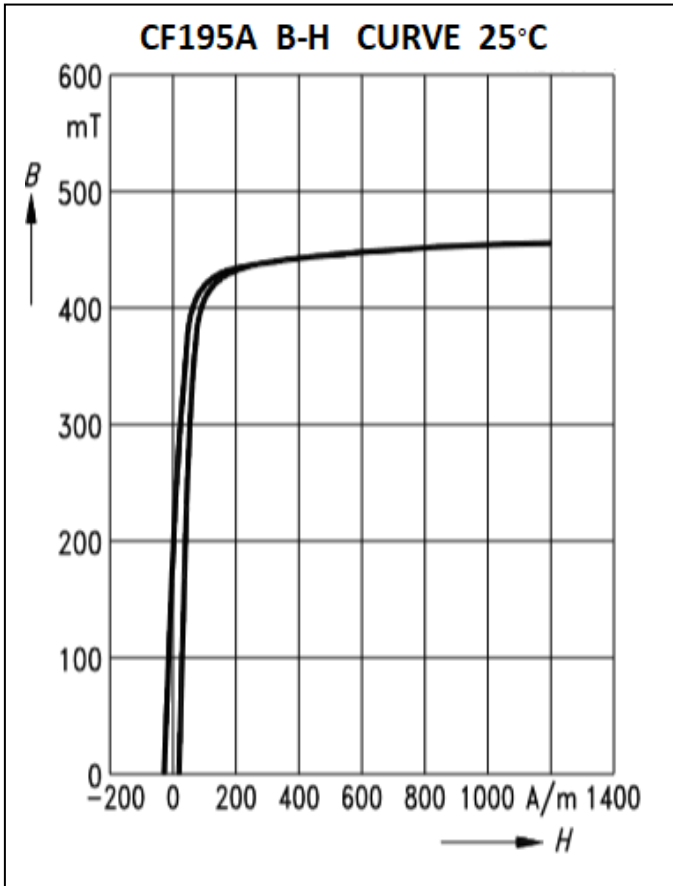

Date: 20 May 2018

*Material data specified here have been derived from measurement on toroid core T2512