



SPECIFICATION FOR APPROVAL

File No.: Q/FRK 0.GS.E.C3H-C03

Product Name	Snubber capacitor for IGBT (PCB)
Product Type:	C3H
Product Code	
Customer	
Customer Code	
Issue Date	2012-10




Semic Trade, s.r.o., Volutová 2521/18, 158 00 Praha 5
Telephone: +420 251 625 331, 251 625 332, 251 625 377
GSM: +420 605 999 994 Fax: +420 251 626 252, 251 626 393



www.semic.cz
semic@semic.cz

Snubber capacitor for IGBT (PCB)

■ Outline Drawing

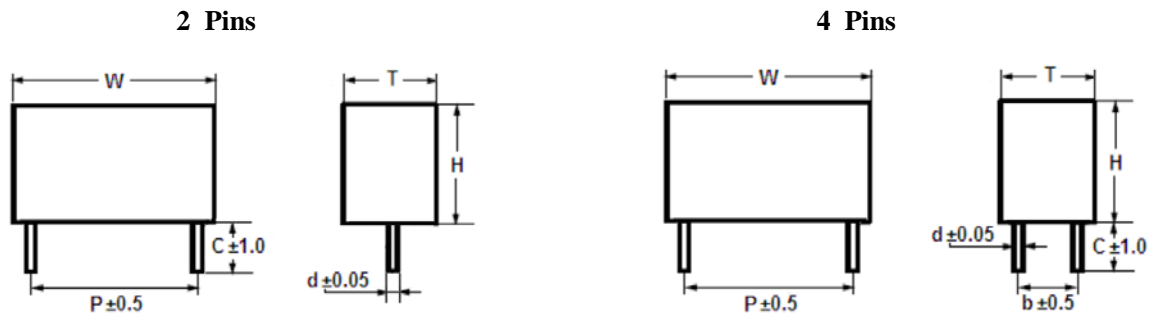

■ Features

- Widely used in high voltage, high frequency circuit
- Low loss and small inherent temperature rise
- Excellent active and passive flame resistant circuit
- Especially designed as snubber capacitor for IGBT

■ Safety Approvals

•		UL	UL 810 (construction only) File No.: E256238, CCN: CZDS2
---	--	----	---

■ Specifications

Reference Standard	GB/T17702, IEC 61071	
Climatic Category	40/85/56	
Operating temperature range (case)	-40°C~85°C	
Rated Voltage	630Vdc~3 000Vdc	
Capacitance Range	0.047μF~9.0μF	
Capacitance Tolerance	J(±5%), K(±10%)	
Test voltage	1.5U _N (10s)	
Dissipation Factor	≤0.0005 (1kHz, 20°C)	
Insulation Resistance	≥100 000MΩ, C _N ≤0.33 μ F ≥30 000s C _N >0.33 μ F	(20°C, 100Vdc, 1min)
Operation life time	≥100 000 hours at U _N , T _{amb} =70°C	

■ Part number system

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	3	H															

Digit 1 to 3 Series code
 C3H

Digit 4 to 5 D.C. rated voltage
 2J=630V, 1V=700V, 1W=850V, 3A=1000V, 3L=1200V,
 3C=1600V, 7M=1700V, 3D=2000V, 3E=2500V, 4Q=3000V

Digit 6 to 8 Rated capacitance value
 For example: 105=10×10⁵ pF= 1.0μF

Digit 9 Capacitance tolerance
 J=±5%, K=±10%, M=±20%

Digit 10 Pitch
 D=32.5 mm F=37.5 mm M=52.5 mm

Digit 11 Internal use

Digit 12 to 15 Lead form and packaging code
 Refer to table 1

Digit 16~18 Internal use

Table 1 lead form and packaging code

Digit 12		Digit 13 and Digit 14		Digit 15	
Code	explanation	Code	explanation	Code	explanation
0	Two pins(bulk)	00 38	standard lead length 5.5mm lead length 3.8mm	0	Length tolerance ±1.0mm
6	four pins(bulk) b=5.0mm			2	Length tolerance ±0.5mm
1	four pins(bulk) b=10.0mm				
2	four pins(bulk) b=12.7mm				
3	four pins(bulk) b=20.0mm				
A	four pins(bulk) b=20.3mm				
B	four pins(bulk) b=10.2mm				
C	four pins(bulk) b=5.1mm				

■ Technical data(mm)

630Vdc /700Vdc (420Vac) #												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Î (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.68	37.0	25.0	15.0	32.5	—	1.2	900	612	6.0	11	23	C3H1V684+D00+++***
0.68	37.0	25.0	15.0	32.5	5.1	1.0	900	612	5.0	13	23	C3H1V684+D0C+++***
1.0	37.0	30.0	16.0	32.5	—	1.2	900	900	6.0	12	23	C3H1V105+ D00+++***
1.0	37.0	30.0	16.0	32.5	5.1	1.0	900	900	5.0	14	23	C3H1V105+ D0C+++***
1.2	37.0	30.0	16.0	32.5	—	1.2	900	1 080	5.5	14	23	C3H1V125+ D00+++***
1.2	37.0	30.0	16.0	32.5	5.1	1.0	900	1 080	4.5	16	23	C3H1V125+ D0C+++***
1.5	37.0	34.0	20.0	32.5	—	1.2	900	1 350	5.5	14	23	C3H1V155+ D00+++***
1.5	37.0	34.0	20.0	32.5	10.2	1.0	900	1 350	4.5	17	23	C3H1V155+ D0B+++***
1.8	37.0	34.0	20.0	32.5	—	1.2	900	1 620	5.5	14	23	C3H1V185+ D00+++***
1.8	37.0	34.0	20.0	32.5	10.2	1.0	900	1 620	4.5	18	23	C3H1V185+ D0B+++***
2.0	42.0	40.0	20.0	37.5	—	1.2	600	1 200	5.0	14	29	C3H1V205+ F00+++***
2.0	42.0	40.0	20.0	37.5	10.2	1.2	600	1 200	4.0	18	29	C3H1V205+ F0B+++***
2.2	42.0	40.0	20.0	37.5	—	1.2	600	1 320	5.0	14	29	C3H1V225+ F00+++***
2.2	42.0	40.0	20.0	37.5	10.2	1.2	600	1 320	4.0	18.5	29	C3H1V225+ F0B+++***
2.5	42.0	40.0	20.0	37.5	—	1.2	600	1 500	5.0	14	29	C3H1V255+ F00+++***
2.5	42.0	40.0	20.0	37.5	10.2	1.2	600	1 500	4.0	19	29	C3H1V255+ F0B+++***
3.0	42.0	44.0	24.0	37.5	—	1.2	600	1 800	5.0	14	29	C3H1V305+ F00+++***
3.0	42.0	44.0	24.0	37.5	12.7	1.2	600	1 800	4.0	20	29	C3H1V305+ F02+++***
3.3	42.0	44.0	24.0	37.5	—	1.2	600	1 980	4.5	14	29	C3H1V335+ F00+++***
3.3	42.0	44.0	24.0	37.5	12.7	1.2	600	1 980	3.5	20	29	C3H1V335+ F02+++***
4.0	42.0	44.0	24.0	37.5	—	1.2	600	2 400	4.5	14	29	C3H1V405+ F00+++***
4.0	42.0	44.0	24.0	37.5	12.7	1.2	600	2 400	3.5	21	29	C3H1V405+ F02+++***
4.7	42.0	45.0	30.0	37.5	20.3	1.2	600	2 820	3.5	23	29	C3H1V475+F0A+++***
5.0	42.0	45.0	30.0	37.5	20.3	1.2	600	3 000	3.0	23.5	29	C3H1V505+F0A+++***
6.0	42.0	43.0	42.0	37.5	20.3	1.2	600	3600	3.0	25	29	C3H1V605+F0A+++***
6.5	42.0	43.0	42.0	37.5	20.3	1.2	600	3 900	3.0	26	29	C3H1V655+F0A+++***
6.5	57.0	43.5	29.5	52.5	20.3	1.2	360	2 340	2.5	24	33	C3H1V655+M0A+++***
7.0	57.0	43.5	29.5	52.5	20.3	1.2	360	2 520	2.5	25	33	C3H1V705+M0A+++***
8.0	57.0	50.0	35.0	52.5	20.3	1.2	360	2 880	2.5	27	33	C3H1V805+M0A+++***
9.0	57.0	50.0	35.0	52.5	20.3	1.2	360	3 240	2.5	28	33	C3H1V905+M0A+++***

850Vdc (450Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Î (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.47	37.0	25.0	15.0	32.5	—	1.2	1 200	564	6.0	13	23	C3H1W474+ D00+++***
0.47	37.0	25.0	15.0	32.5	5.1	1.0	1 200	564	5.0	15	23	C3H1W474+ D0C+++***
0.68	37.0	30.0	16.0	32.5	—	1.2	1 200	816	6.0	14	23	C3H1W684+ D00+++***
0.68	37.0	30.0	16.0	32.5	5.1	1.0	1 200	816	5.0	16	23	C3H1W684+ D0C+++***
1.0	37.0	34.0	20.0	32.5	—	1.2	1 200	1 200	6.0	14	23	C3H1W105+ D00+++***
1.0	37.0	34.0	20.0	32.5	10.2	1.0	1 200	1 200	5.0	17	23	C3H1W105+ D0B+++***
1.2	37.0	34.0	20.0	32.5	—	1.2	1 200	1 440	6.0	14	23	C3H1W125+ D00+++***
1.2	37.0	34.0	20.0	32.5	10.2	1.0	1 200	1 440	5.0	17.5	23	C3H1W125+ D0B+++***

■ Technical data(mm)

850Vdc (450Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Ī (A)	ESR	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
									MAX@100kHz (mΩ)			
1.5	37.0	34.0	20.0	32.5	—	1.2	1 200	1 800	6.0	14	23	C3H1W155+ D00+++***
1.5	37.0	34.0	20.0	32.5	10.2	1.0	1 200	1 800	5.0	18	23	C3H1W155+ D0B+++***
1.5	42.0	40.0	20.0	37.5	—	1.2	750	1 125	5.5	14	29	C3H1W155+F00+++***
1.5	42.0	40.0	20.0	37.5	10.2	1.2	750	1 125	4.5	18.5	29	C3H1W155+F0B+++***
2.0	42.0	40.0	20.0	37.5	—	1.2	750	1 500	5.5	14	29	C3H1W205+F00+++***
2.0	42.0	40.0	20.0	37.5	10.2	1.2	750	1 500	4.5	19	29	C3H1W205+F0B+++***
2.2	42.0	40.0	20.0	37.5	—	1.2	750	1 650	5.5	14	29	C3H1W225+F00+++***
2.2	42.0	40.0	20.0	37.5	10.2	1.2	750	1 650	4.5	19.5	29	C3H1W225+F0B+++***
2.5	42.0	44.0	24.0	37.5	—	1.2	750	1 875	5.5	14	29	C3H1W255+F00+++***
2.5	42.0	44.0	24.0	37.5	12.7	1.2	750	1 875	4.5	20	29	C3H1W255+F02+++***
3.0	42.0	44.0	24.0	37.5	—	1.2	750	2 250	5.5	14	29	C3H1W305+F00+++***
3.0	42.0	44.0	24.0	37.5	12.7	1.2	750	2 250	4.5	21	29	C3H1W305+F02+++***
3.3	42.0	45.0	30.0	37.5	20.3	1.2	750	2 475	4.5	21.5	29	C3H1W335+F0A+++***
4.0	42.0	43.0	42.0	37.5	20.3	1.2	750	3 000	4.5	22	29	C3H1W405+F0A+++***
4.0	57.0	43.5	29.5	52.5	20.3	1.2	450	1 800	4.0	23	33	C3H1W405+M0A+++***
4.7	57.0	43.5	29.5	52.5	20.3	1.2	450	2 115	4.0	24.5	33	C3H1W475+M0A+++***
5.0	57.0	43.5	29.5	52.5	20.3	1.2	450	2 250	4.0	25	33	C3H1W505+M0A+++***
6.0	57.0	50.0	35.0	52.5	20.3	1.2	450	2 700	4.0	26	33	C3H1W605+M0A+++***
6.5	57.0	50.0	35.0	52.5	20.3	1.2	450	2 925	4.0	27	33	C3H1W655+M0A+++***

1 000Vdc (500Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Ī (A)	ESR	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
									MAX@100kHz (mΩ)			
0.47	37.0	25.0	15.0	32.5	—	1.2	1 300	611	6.0	12	23	C3H3A474+D00+++***
0.47	37.0	25.0	15.0	32.5	5.1	1.0	1 300	611	5.0	14	23	C3H3A474+D0C+++***
0.68	37.0	30.0	16.0	32.5	—	1.2	1 300	884	6.0	13	23	C3H3A684+D00+++***
0.68	37.0	30.0	16.0	32.5	5.1	1.0	1 300	884	5.0	15	23	C3H3A684+D0C+++***
0.82	37.0	30.0	16.0	32.5	—	1.2	1 300	1 066	6.0	14	23	C3H3A824+D00+++***
0.82	37.0	30.0	16.0	32.5	5.1	1.0	1 300	1 066	5.0	16	23	C3H3A824+D0C+++***
1.0	37.0	34.0	20.0	32.5	—	1.2	1 300	1 300	5.5	14	23	C3H3A105+ D00+++***
1.0	37.0	34.0	20.0	32.5	10.2	1.0	1 300	1 300	4.5	17	23	C3H3A105+ D0B+++***
1.2	37.0	34.0	20.0	32.5	—	1.2	1 300	1 560	5.5	14	23	C3H3A125+ D00+++***
1.2	37.0	34.0	20.0	32.5	10.2	1.0	1 300	1 560	4.5	17	23	C3H3A125+ D0B+++***
1.2	42.0	40.0	20.0	37.5	—	1.2	850	1 020	5.5	14	29	C3H3A125+ F00+++***
1.2	42.0	40.0	20.0	37.5	10.2	1.2	850	1 020	4.5	16	29	C3H3A125+ F0B+++***
1.5	42.0	40.0	20.0	37.5	—	1.2	850	1 275	5.5	14	29	C3H3A155+ F00+++***
1.5	42.0	40.0	20.0	37.5	10.2	1.2	850	1 275	4.5	16	29	C3H3A155+ F0B+++***
2	42.0	44.0	24.0	37.5	—	1.2	850	1 700	5.5	14	29	C3H3A205+ F00+++***
2	42.0	44.0	24.0	37.5	12.7	1.2	850	1 700	4.5	17	29	C3H3A205+ F02+++***

■ Technical data (mm)

1 000Vdc (500Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	İ (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
2.2	42.0	44.0	24.0	37.5	—	1.2	850	1 870	5.0	14	29	C3H3A225+ F00+++***
2.2	42.0	44.0	24.0	37.5	12.7	1.2	850	1 870	4.0	20	29	C3H3A225+ F02+++***
2.5	42.0	45.0	30.0	37.5	20.3	1.2	850	2 125	4.0	21	29	C3H3A255+ F0A+++***
3.0	42.0	45.0	30.0	37.5	20.3	1.2	850	2 550	4.0	21.5	29	C3H3A305+ F0A+++***
3.3	42.0	43.0	42.0	37.5	20.3	1.2	850	2 805	4.0	22	29	C3H3A335+ F0A+++***
3.3	57.0	43.5	29.5	52.5	20.3	1.2	500	1 650	4.0	20	33	C3H3A335+ M0A+++***
4.0	57.0	43.5	29.5	52.5	20.3	1.2	500	2 000	4.0	21	33	C3H3A405+ M0A+++***
4.7	57.0	50.0	35.0	52.5	20.3	1.2	500	2 350	4.0	22	33	C3H3A475+ M0A+++***
5.0	57.0	50.0	35.0	32.5	20.3	1.2	500	2 500	4.0	23	33	C3H3A505+ M0A+++***

1 200Vdc (600Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	İ (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.33	37.0	25.0	15.0	32.5	—	1.2	1 500	495	6.5	11.5	23	C3H3L334+ D00+++***
0.33	37.0	25.0	15.0	32.5	5.1	1.0	1 500	495	5.5	13.5	23	C3H3L334+ D0C+++***
0.47	37.0	30.0	16.0	32.5	—	1.2	1 500	705	6.5	12	23	C3H3L474+ D00+++***
0.47	37.0	30.0	16.0	32.5	5.1	1.0	1 500	705	5.5	14	23	C3H3L474+ D0C+++***
0.68	37.0	34.0	20.0	32.5	—	1.2	1 500	1 020	6.5	13	23	C3H3L684+ D00+++***
0.68	37.0	34.0	20.0	32.5	10.2	1.0	1 500	1 020	5.5	15	23	C3H3L684+ D0B+++***
0.75	37.0	34.0	20.0	32.5	—	1.2	1 500	1 125	6.5	14	23	C3H3L754+ D00+++***
0.75	37.0	34.0	20.0	32.5	10.2	1.0	1 500	1 125	5.5	16	23	C3H3L754+ D0B+++***
0.82	42.0	40.0	20.0	37.5	—	1.2	950	779	6.0	14	29	C3H3L824+ F00+++***
0.82	42.0	40.0	20.0	37.5	10.2	1.2	950	779	5.0	16	29	C3H3L824+ F0B+++***
1.0	42.0	40.0	20.0	37.5	—	1.2	950	950	6.0	14	29	C3H3L105+ F00+++***
1.0	42.0	40.0	20.0	37.5	10.2	1.2	950	950	5.0	17	29	C3H3L105+ F0B+++***
1.2	42.0	44.0	24.0	37.5	—	1.2	950	1 140	5.5	14	29	C3H3L125+ F00+++***
1.2	42.0	44.0	24.0	37.5	12.7	1.2	950	1 140	4.5	17	29	C3H3L125+ F02+++***
1.5	42.0	44.0	24.0	37.5	—	1.2	950	1 425	5.5	14	29	C3H3L155+ F00+++***
1.5	42.0	44.0	24.0	37.5	12.7	1.2	950	1 425	4.5	17.5	29	C3H3L155+ F02+++***
2.0	42.0	45.0	30.0	37.5	20.3	1.2	950	1 900	4.5	18	29	C3H3L205+ F0A+++***
2.2	42.0	43.0	42.0	37.5	20.3	1.2	950	2 090	4.5	19	29	C3H3L225+ F0A+++***
2.5	42.0	43.0	42.0	37.5	20.3	1.2	950	2 375	4.5	20	29	C3H3L255+ F0A+++***
2.2	57.0	43.5	29.5	52.5	20.3	1.2	600	1 320	4.0	18	33	C3H3L225+ M0A+++***
2.5	57.0	43.5	29.5	52.5	20.3	1.2	600	1 500	4.0	19	33	C3H3L255+ M0A+++***
3.0	57.0	50.0	35.0	52.5	20.3	1.2	600	1 800	4.0	20	33	C3H3L305+ M0A+++***
3.3	57.0	50.0	35.0	52.5	20.3	1.2	600	1 980	4.0	21	33	C3H3L335+ M0A+++***
3.5	57.0	50.0	35.0	52.5	20.3	1.2	600	2 400	4.0	22	33	C3H3L355+ M0A+++***

■ Technical data (mm)

1 600Vdc (650Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Î (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.22	37.0	25.0	15.0	32.5	—	1.2	1 900	418	7.5	11	23	C3H3C224+ D00++++**
0.22	37.0	25.0	15.0	32.5	5.1	1.0	1 900	418	6.5	13	23	C3H3C224+ D0C++++**
0.33	37.0	30.0	16.0	32.5	—	1.2	1 900	627	7.5	11.5	23	C3H3C334+ D00++++**
0.33	37.0	30.0	16.0	32.5	5.1	1.0	1 900	627	6.5	13.5	23	C3H3C334+ D0C++++**
0.39	37.0	34.0	20.0	32.5	—	1.2	1 900	741	7.0	12	23	C3H3C394+ D00++++**
0.39	37.0	34.0	20.0	32.5	5.1	1.0	1 900	741	6.0	14	23	C3H3C394+ D0C++++**
0.47	37.0	34.0	20.0	32.5	—	1.2	1 900	893	7.0	13	23	C3H3C474+ D00++++**
0.47	37.0	34.0	20.0	32.5	10.2	1.0	1 900	893	6.0	15	23	C3H3C474+ D0B++++**
0.68	42.0	40.0	20.0	37.5	—	1.2	1 250	850	4.0	14	29	C3H3C684+ F00++++**
0.68	42.0	40.0	20.0	37.5	10.2	1.2	1 250	850	4.0	16	29	C3H3C684+ F0B++++**
0.82	42.0	44.0	24.0	37.5	—	1.2	1 250	1 025	4.0	14	29	C3H3C824+ F00++++**
0.82	42.0	44.0	24.0	37.5	12.7	1.2	1 250	1 025	4.0	17	29	C3H3C824+ F02++++**
1.0	42.0	45.0	30.0	37.5	20.3	1.2	1 250	1 250	4.0	17.5	29	C3H3C105+ F0A++++**
1.2	42.0	45.0	30.0	37.5	20.3	1.2	1 250	1 500	4.0	18	29	C3H3C125+ F0A++++**
1.5	42.0	43.0	42.0	37.5	20.3	1.2	1 250	1 875	4.0	19	29	C3H3C155+ F0A++++**
1.5	57.0	43.5	29.5	52.5	20.3	1.2	750	1 125	4.0	20	33	C3H3C155+ M0A++++**
2.0	57.0	50.0	35.0	52.5	20.3	1.2	750	1 500	4.0	22	33	C3H3C205+ M0A++++**

1 700Vdc (675Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Î (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.15	37.0	25.0	15.0	32.5	—	1.2	2 000	300	8.5	10	23	C3H7M154+ D00++++**
0.15	37.0	25.0	15.0	32.5	5.1	1.0	2 000	300	7.5	12	23	C3H7M154+ D0C++++**
0.22	37.0	30.0	16.0	32.5	—	1.2	2 000	440	7.5	11	23	C3H7M224+ D00++++**
0.22	37.0	30.0	16.0	32.5	5.1	1.0	2 000	440	6.5	13	23	C3H7M224+ D0C++++**
0.33	37.0	34.0	20.0	32.5	—	1.2	2 000	660	7.0	11.5	23	C3H7M334+ D00++++**
0.33	37.0	34.0	20.0	32.5	10.2	1.0	2 000	660	6.0	13.5	23	C3H7M334+ D0B++++**
0.39	37.0	34.0	20.0	32.5	—	1.2	2 000	780	7.0	12	23	C3H7M394+ D00++++**
0.39	37.0	34.0	20.0	32.5	10.2	1.0	2 000	780	6.0	14	23	C3H7M394+ D0B++++**
0.47	42.0	36.0	24.0	37.5	—	1.2	1 260	592	6.0	12	29	C3H7M474+ F00++++**
0.47	42.0	36.0	24.0	37.5	12.7	1.2	1 260	592	5.0	14	29	C3H7M474+ F02++++**
0.56	42.0	36.0	24.0	37.5	—	1.2	1 260	706	6.0	13	29	C3H7M564+ F00++++**
0.56	42.0	36.0	24.0	37.5	12.7	1.2	1 260	706	5.0	15	29	C3H7M564+ F02++++**
0.68	42.0	44.0	24.0	37.5	—	1.2	1 260	857	6.0	14	29	C3H7M684+ F00++++**
0.68	42.0	44.0	24.0	37.5	12.7	1.2	1 260	857	6.0	16	29	C3H7M684+ F02++++**
0.82	42.0	44.0	24.0	37.5	—	1.2	1 260	1 033	5.5	14	29	C3H7M824+ F00++++**
0.82	42.0	44.0	24.0	37.5	12.7	1.2	1 260	1 033	4.5	17	29	C3H7M824+ F02++++**
1.0	42.0	45.0	30.0	37.5	20.3	1.2	1 260	1 260	4.5	18	29	C3H7M105+ F0A++++**
1.2	42.0	43.0	42.0	37.5	20.3	1.2	1 260	1 512	4.5	19	29	C3H7M125+ F0A++++**
1.0	57.0	45.0	25.0	52.5	20.3	1.2	780	780	4.0	16	33	C3H7M105+ M0A++++**
1.2	57.0	43.5	29.5	52.5	20.3	1.2	780	936	4.0	17	33	C3H7M125+ M0A++++**
1.5	57.0	43.5	29.5	52.5	20.3	1.2	780	1 170	4.0	20	33	C3H7M155+ M0A++++**
2.0	57.0	50.0	35.0	52.5	20.3	1.2	780	1 560	4.0	22	33	C3H7M205+ M0A++++**

■ Technical data (mm)

2 000Vdc (700Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Ī (A)	ESR	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
									MAX@100kHz (mΩ)			
0.10	37.0	25.0	15.0	32.5	—	1.2	2 241	224	9.5	10	23	C3H3D104+ D00+++***
0.10	37.0	25.0	15.0	32.5	5.1	1.0	2 241	224	8.5	12	23	C3H3D104+ D0C+++***
0.15	37.0	25.0	15.0	32.5	—	1.2	2 241	336	9.5	11	23	C3H3D154+ D00+++***
0.15	37.0	25.0	15.0	32.5	5.1	1.0	2 241	336	8.5	13	23	C3H3D154+ D0C+++***
0.22	37.0	30.0	16.0	32.5	—	1.2	2 241	493	7.5	11.5	23	C3H3D224+ D00+++***
0.22	37.0	30.0	16.0	32.5	5.1	1.0	2 241	493	6.5	13.5	23	C3H3D224+ D0C+++***
0.33	37.0	34.0	20.0	32.5	—	1.2	2 241	740	7.5	12	23	C3H3D334+ D00+++***
0.33	37.0	34.0	20.0	32.5	10.2	1.0	2 241	740	6.5	14	23	C3H3D334+ D0B+++***
0.47	42.0	40.0	20.0	37.5	—	1.2	1 300	611	6.0	13	29	C3H3D474+ F00+++***
0.47	42.0	40.0	20.0	37.5	10.2	1.2	1 300	611	5.0	15	29	C3H3D474+ F0B+++***
0.56	42.0	44.0	24.0	37.5	—	1.2	1 300	728	6.0	14	29	C3H3D564+ F00+++***
0.56	42.0	44.0	24.0	37.5	12.7	1.2	1 300	728	5.0	16	29	C3H3D564+ F02+++***
0.68	42.0	44.0	24.0	37.5	—	1.2	1 300	884	5.5	14	29	C3H3D684+ F00+++***
0.68	42.0	44.0	24.0	37.5	12.7	1.2	1 300	884	4.5	16.5	29	C3H3D684+ F02+++***
0.82	42.0	45.0	30.0	37.5	20.3	1.2	1 300	1 066	4.5	17	29	C3H3D824+ F0A+++***
1.0	42.0	43.0	42.0	37.5	20.3	1.2	1 300	1 300	4.5	19	29	C3H3D105+ F0A+++***
1.0	57.0	43.5	29.5	52.5	20.3	1.2	850	850	4.5	20	33	C3H3D105+ M0A+++***
1.2	57.0	43.5	29.5	52.5	20.3	1.2	850	1 020	4.5	21	33	C3H3D125+ M0A+++***
1.5	57.0	50.0	35.0	52.5	20.3	1.2	850	1 275	4.5	22	33	C3H3D155+ M0A+++***

2 500Vdc (725Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	Ī (A)	ESR	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
									MAX@100kHz (mΩ)			
0.068	37.0	25.0	15.0	32.5	—	1.2	3 230	220	10.0	10	23	C3H3E683+ D00+++***
0.068	37.0	25.0	15.0	32.5	5.1	1.0	3 230	220	9.0	12	23	C3H3E683+ D0C+++***
0.10	37.0	30.0	16.0	32.5	—	1.2	3 230	323	10.0	11	23	C3H3E104+ D00+++***
0.10	37.0	30.0	16.0	32.5	5.1	1.0	3 230	323	9.0	13	23	C3H3E104+ D0C+++***
0.15	37.0	34.0	20.0	32.5	—	1.2	3 230	485	9.5	12	23	C3H3E154+ D00+++***
0.15	37.0	34.0	20.0	32.5	10.2	1.0	3 230	485	8.5	14	23	C3H3E154+ D0B+++***
0.18	37.0	34.0	20.0	32.5	—	1.2	3 230	581	9.0	13	23	C3H3E184+ D00+++***
0.18	37.0	34.0	20.0	32.5	10.2	1.0	3 230	581	8.0	15	23	C3H3E184+ D0B+++***
0.22	42.0	40.0	20.0	37.5	—	1.2	2 100	462	5.5	13	29	C3H3E224+ F00+++***
0.22	42.0	40.0	20.0	37.5	10.2	1.2	2 100	462	4.5	15	29	C3H3E224+ F0B+++***
0.33	42.0	44.0	24.0	37.5	—	1.2	2 100	693	5.5	13	29	C3H3E334+ F00+++***
0.33	42.0	44.0	24.0	37.5	12.7	1.2	2 100	693	4.5	15.2	29	C3H3E334+ F02+++***
0.47	42.0	45.0	30.0	37.5	20.3	1.2	2 100	987	4.0	16	29	C3H3E474+ F0A+++***
0.68	42.0	43.0	42.0	37.5	20.3	1.2	2 100	1428	4.0	16.5	29	C3H3E684+ F0A+++***
0.68	57.0	43.5	29.5	52.5	20.3	1.2	1 200	816	4.0	17	33	C3H3E684+ M0A+++***
1.0	57.0	50.0	35.0	52.5	20.3	1.2	1 200	1 200	4.0	17.5	33	C3H3E105+ M0A+++***

■ Technical data (mm)

3 000Vdc (750Vac)												
C _N (μF)	W ±1.0	H ±1.0	T ±1.0	P ±0.5	b ±0.5	d ±0.05	dV/dt (V/μs)	İ (A)	ESR MAX@100kHz (mΩ)	I _{rms} 100kHz@70°C (A)	L _s (nH)	Part number
0.047	37.0	25.0	15.0	32.5	—	1.2	3 361	158	10.5	9	23	C3H4Q473+ D00+++***
0.047	37.0	25.0	15.0	32.5	5.1	1.0	3 361	158	9.5	11	23	C3H4Q473+ D0C+++***
0.068	37.0	30.0	16.0	32.5	—	1.2	3 361	229	10.0	10	23	C3H4Q683+ D00+++***
0.068	37.0	30.0	16.0	32.5	5.1	1.0	3 361	229	9.0	12	23	C3H4Q683+ D0C+++***
0.10	37.0	34.0	20.0	32.5	—	1.2	3 361	336	9.5	11	23	C3H4Q104+ D00+++***
0.10	37.0	34.0	20.0	32.5	10.2	1.0	3 361	336	8.5	13	23	C3H4Q104+ D0B+++***
0.15	37.0	34.0	20.0	32.5	—	1.2	3 361	504	9.0	11.5	23	C3H4Q154+ D00+++***
0.15	37.0	34.0	20.0	32.5	10.2	1.0	3 361	504	8.0	13.5	23	C3H4Q154+ D0B+++***
0.22	42.0	40.0	20.0	37.5	—	1.2	2 050	451	7.0	12	29	C3H4Q224+ F00+++***
0.22	42.0	40.0	20.0	37.5	10.2	1.2	2 050	451	6.0	14	29	C3H4Q224+ F0B+++***
0.33	42.0	45.0	30.0	37.5	20.3	1.2	2 050	677	5.5	14.5	29	C3H4Q334+ F0A+++***
0.47	42.0	43.0	42.0	37.5	20.3	1.2	2 050	964	5.0	16	29	C3H4Q474+ F0A+++***
0.47	57.0	43.5	29.5	52.5	20.3	1.2	1 200	564	5.0	16.5	33	C3H4Q474+ M0A+++***
0.68	57.0	50.0	35.0	52.5	20.3	1.2	1 200	816	5.0	17	33	C3H4Q684+ M0A+++***
0.82	57.0	50.0	35.0	52.5	20.3	1.2	1 200	984	4.5	18	33	C3H4Q824+ M0A+++***

Note: 1."+"=capacitance tolerance code M=±20%,K=±10%, J=±5%

2."#"when the rated voltage is 630Vdc,the digit 4~5 is 2J.

3."***"= Internal use

4. When the b=5.0mm, the digit 12 is "6";When the b=10.0mm, the digit 12 is "1"; When the b=20.0mm, the digit 12 is "3".

5."I_{rms}"at 100kHz,+70°C for case operating T=+85°C.

6."ESR","L_s"are typical values.


■ Test Method And Performance

No.	Item	Performance	Testing Method IEC 61071
1	5.14.2 External inspection	Legible marking and finish as specified Dimensions: see specific drawing	Check for finish, marking and overall dimensions
	Initial measurements	Capacitance at 1kHz $tg\delta$ at 10kHz, $C \leq 1.0\mu F$ $tg\delta$ at 1kHz, $C > 1.0\mu F$	
	5.14.1.1 Robustness of terminations	There shall be no visible damage	Tensile U_{a1} Wire diameter load $d \leq 0.8mm$ 10N $0.8 mm < d \leq 1.2mm$ 20N duration 10s $\pm 1s$ Bending U_{b1} Wire diameter load $d \leq 0.8 mm$ 5N $0.8 mm < d \leq 1.2 mm$ 10N $4 \times 90^\circ$, duration 2s to 3s
	5.14.1.6 Resistance to soldering heat	There shall be no visible damage.	Solder temperature: $260^\circ C \pm 5^\circ C$ Immersion time: 10s $\pm 1s$
	Final measurements	$ \Delta C/C \leq 0.5\%$ (relative to the initial value) Increase of $tg\delta$: ≤ 0.005	
2	Initial measurements	Capacitance at 1kHz $t tg\delta$ at 10kHz, $C \leq 1.0\mu F$ $tg\delta$ at 1kHz, $C > 1.0\mu F$	
	5.14.3.1 Vibration	There shall be no evidence damage	$f = 10 Hz$ to 55Hz $a = \pm 0.35mm$ Test duration per axis = 10 frequency cycles (3 axes offset from each other by $90^\circ C$), 1 octave/min, the total times are 135min for 3 axes.
	5.14.3.1 Impacts	There shall be no evidence damage	1 000times, Acceleration: $390m/s^2$ Pulse duration: 6ms
	Final measurements	$ \Delta C/C \leq 0.5\%$ (relative to the initial value) Increase of $tg\delta$: ≤ 0.002	
3	Initial measurements	Capacitance at 1kHz $tg\delta$ at 10kHz, $C \leq 1.0\mu F$ $tg\delta$ at 1kHz, $C > 1.0\mu F$	
	5.9 Surge discharge test		Test voltage: $1.1U_{NDC}$ Number of discharges: 5 Time lapse every 2 min (10min total) Within 5 min after the surge discharge test, the capacitor shall be subjected to a voltage test between terminals: $1.5U_{NDC}$, 60s
	Final measurements	$ \Delta C/C \leq 1.0\%$ (relative to the initial value) $tg\delta: \leq 1.2 \times tg\delta_0$ (the initial $tg\delta$) + 0.0001	

No.	Item	Performance	Testing Method IEC 61071
4	Initial measurements	Capacitance at 1kHz tgδ at 10kHz, C≤1.0μF tgδ at 1kHz, C>1.0μF	
	5.11 Self-healing		Voltage: 1.5U _{NDC} Duration: 10s If fewer than five clearing occur during this time, the voltage shall be increased slowly until five clearings have occurred since the start of the test or until the voltage has reached 2.5U _{NDC} If fewer than five clearings have occurred when the voltage has reached 2.5U _{NDC} , for a time of 10s, the test shall be finished.
		ΔC/C ≤0.5% (relative to the initial value) tgδ: ≤1.1×tgδ ₀ (the initial tgδ)+0.0001	
5	Initial measurements	Capacitance at 1kHz tgδ at 10kHz, C≤1.0μF tgδ at 1kHz, C>1.0μF	
	5.13.1 Change of temperature	There shall be no evidence of deterioration	Test: Na θ _A =-40°C, θ _B =+85°C 5 cycles, Duration: t=30min
	Final measurements	ΔC/C ≤2.0%(relative to the initial value) Increase of tgδ:≤0.002	
6	Initial measurements	Capacitance at 1kHz tgδ at 10kHz, C≤1.0μF tgδ at 1kHz, C>1.0μF	
	5.13.2 Damp heat, steady state	There shall be no evidence of deterioration.	Temperature: 40°C ±2°C Humidity: 93±3 %RH Duration: 56 days
	5.5.1 Voltage test between terminals	There shall be no permanent puncturing or flashover.	1.5U _{NDC} , 60s
	5.6.1 Voltage test between terminals and case	There shall be no permanent puncturing or flashover.	2 000VAC, 10s
	Final measurements	ΔC/C ≤2.0%(relative to the initial value) Increase of tgδ:≤0.002	
7	Initial measurements	Capacitance at 1kHz tgδ at 10kHz, C≤1.0μF tgδ at 1kHz, C>1.0μF	
	5.10.1 Thermal stability test	Throughout the last 6h, the temperature of the case near of the top rise shall not increase by more than 1°C	Temperature: ambient temperature Test current: 1.1I _{rms} Test frequency: 10kHz Test time: 48h During the last 6h, the temperature of the case near of the top rise shall be measured per 1.5h.
	Final measurements	ΔC/C ≤2.0%(relative to the initial value) tgδ:≤0.002	

No.	Item	Performance	Testing Method IEC 61071
8	Initial measurements	Capacitance at 1kHz $\text{tg}\delta$ at 10kHz, $C \leq 1.0\mu\text{F}$ $\text{tg}\delta$ at 1kHz, $C > 1.0\mu\text{F}$	
	5.15 Endurance		Measuring procedure: (1) $1.3U_{\text{NDC}}$, 85°C , 500h (2) Charging and discharging: Times: 1 000 dv/dt : according to the technical data (3) $1.3U_{\text{NDC}}$, 85°C , 500h
	Final measurements	$ \Delta C/C \leq 3.0\%$ (relative to the initial value) Increase of $\text{tg}\delta: \leq 0.003$	

■ Marking




Marking Introduction:


Sign	Explain	Sign	Explain	Sign	Explain
	Brand	C3H	Type	3000	Rated voltage
104K	Capacitance and Capacitance tolerance			7791170002	Making code

■ Packing in bulk

1 Out packing box for bulk

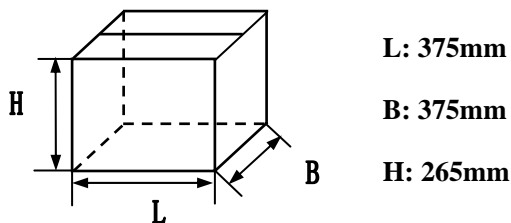

2 Inner packing box for bulk

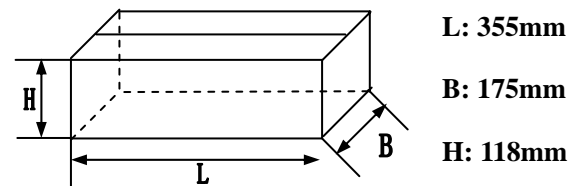

Note: Dimensions of box is possible to be altered on request.