

SPECIFICATION SHEET


ELECTRICAL SPECIFICATIONS:

Type	Unit	FBPT1210
Rated voltage	V	3
Operating Voltage	V	2-5
*Rated Current (MAX)	mA	30
* Min Sound Output at 10 cm	dB	85
Coil Resistance	$\Omega$	$16 \pm 4$
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ}$ C	-20 - +70
Storage Temperature	$^{\circ}$ C	-30 - +80
Housing Material	NORYL	
Weight	g	2

\*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)

@Value applying(resonant frequency, sine wave, measuring current 60  $\mu$  A)

DIMENSIONS      UNIT:mm      Tolerance:  $\pm 0.5$ mm

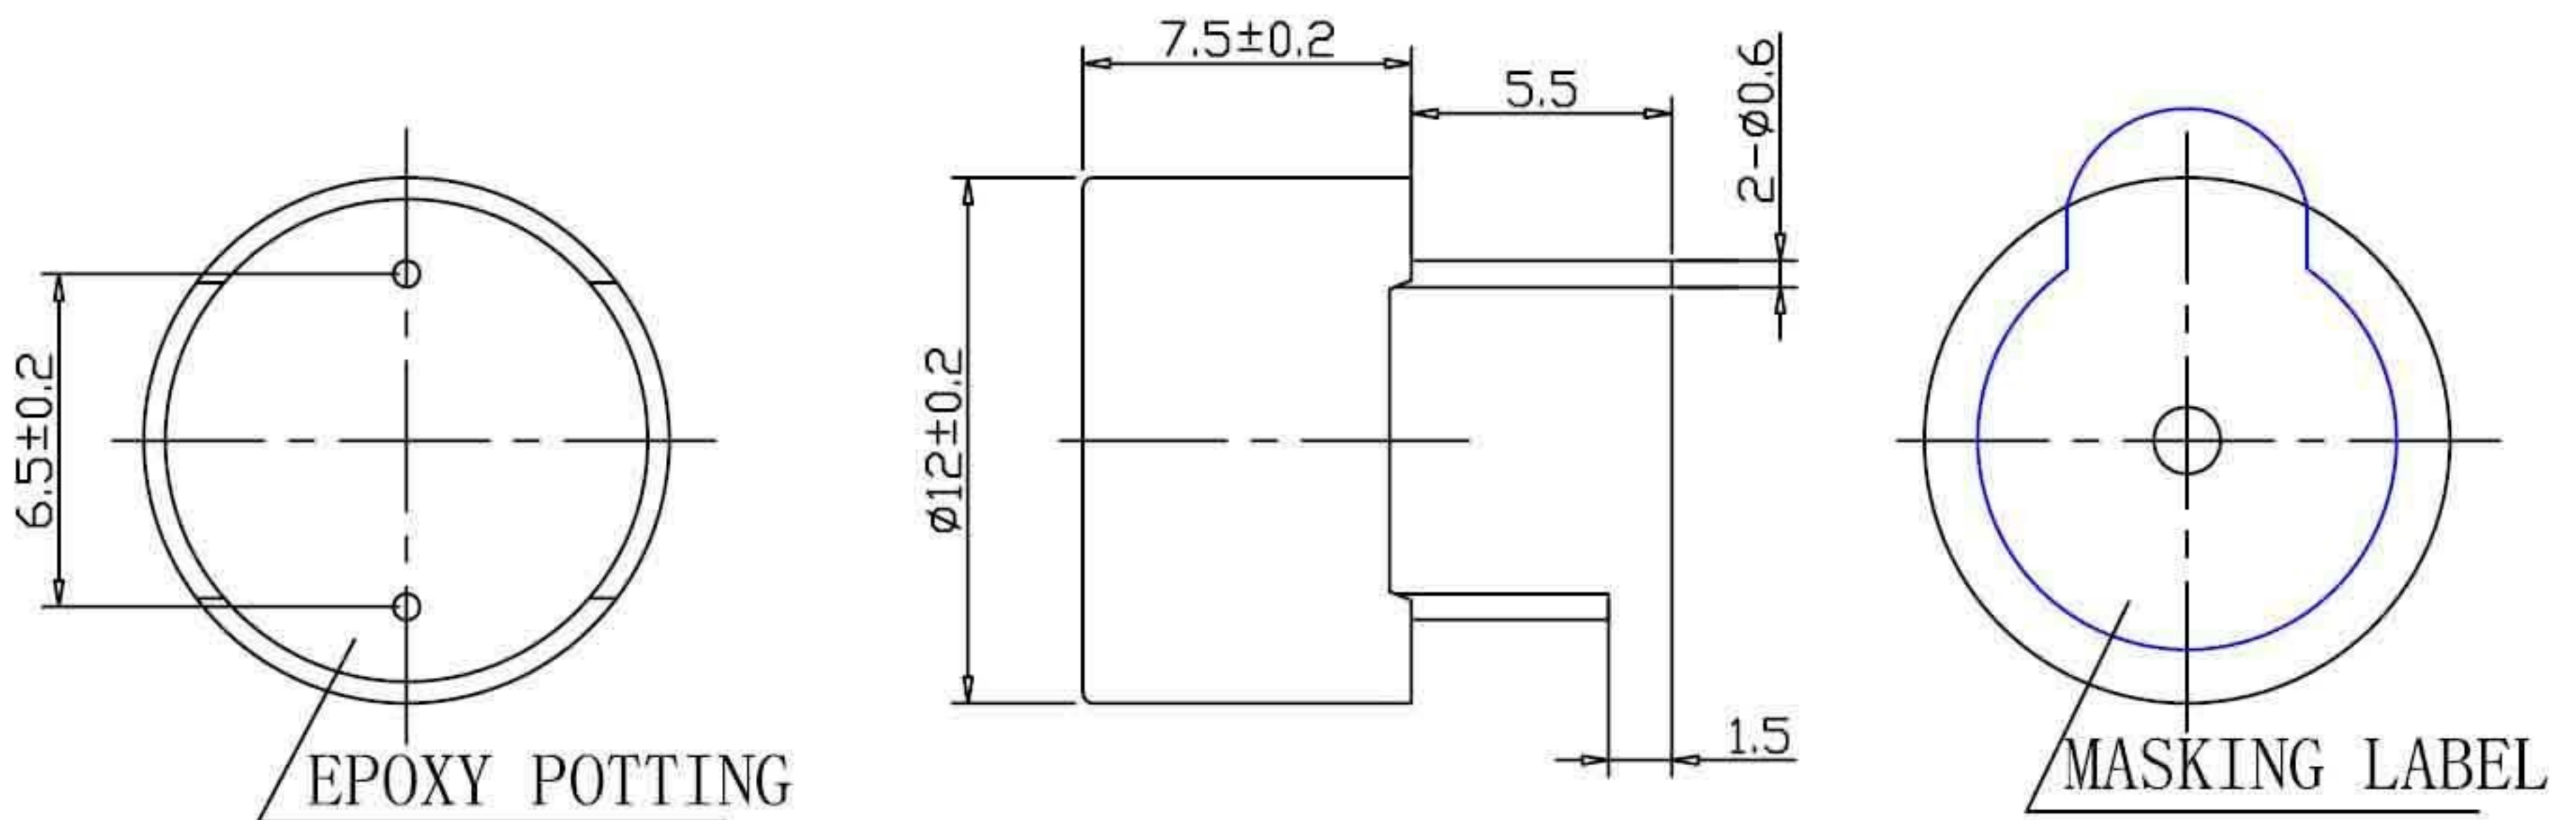

Wave Solder And Wash Allowed

		FBPT1210	
			Page 1/1