




SPECIFICATION

1. Rated Voltage 12Vp-p Square Wave
2. Max. Allowable Voltage 25Vp-p Square Wave
3. Max. Rated Current 2mA at 4.0KHz/12Vp-p Square Wave
4. Resonant Frequency 4.0±0.5KHz
5. Min. Sound Pressure Level 75dB at 4.0KHz/12Vp-p Square Wave/10cm
6. Capacitance at 120Hz 15000pF±30%
7. Case Material ABS
8. Operating Temperature -20 - +60℃
9. Store Temperature -30 - +70℃
10. Weight 1.3g

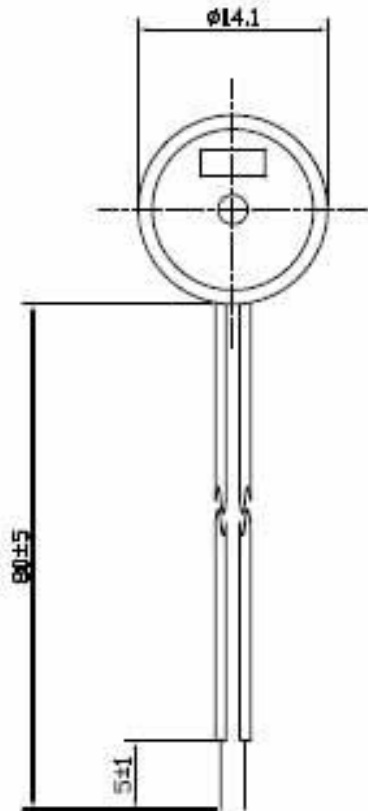

FBPT1440