






NOTES:

1. MATERIALS: HOUSING-LCP UL94V-0 , COVER -LCP UL94V-0
 TERMINAL-PHOSPHOR BRONZE, LATCH -PHOSPHOR BRONZE.
 2. CAMBER: 0.05mm/cm MAX, DEFORMATION: NA,
 WARP: 0.05mm/cm MAX, TWIST: NA.


SECFICATION:

1. CURRENT RATING :0.5A MAX
 2. VOLTAGE RATING :50V AC MAX
 3. OPERATION TEMP: -40°C~+105°C
 4. INSULATION RESISTANCE:500MΩ
 5. DIELECTRIC WITHSTANDING VOLTAGE:500V DC,1min
 6. CONTACT RESISTANCE:40mΩ Max

32	31.00	33.20	37.60	38.10
31	30.00	32.20	36.60	37.10
30	29.00	31.20	35.60	36.10
29	28.00	30.20	34.60	35.10
28	27.00	29.20	33.60	34.10
27	26.00	28.20	32.60	33.10
26	25.00	27.20	31.50	32.10
25	24.00	26.20	30.60	31.10
24	23.00	25.20	29.60	30.10
23	22.00	24.20	28.50	29.10
22	21.00	23.20	27.60	28.10
21	20.00	22.20	26.60	27.10
20	19.00	21.20	25.60	26.10
19	18.00	20.20	24.50	25.10
18	17.00	19.20	23.60	24.10
17	16.00	18.20	22.50	23.10
16	15.00	17.20	21.60	22.10
15	14.00	16.20	20.60	21.10
14	13.00	15.20	19.60	20.10
13	12.00	14.20	18.60	19.10
12	11.00	13.20	17.60	18.10
11	10.00	12.20	16.50	17.10
10	9.00	11.20	15.50	16.10
09	8.00	10.20	14.50	15.10
08	7.00	9.20	13.50	14.10
07	6.00	8.20	12.50	13.10
06	5.00	7.20	11.50	12.10
05	4.00	6.20	10.50	11.10
04	3.00	5.20	9.50	10.10
03	2.00	4.20	8.50	9.10
CKT	DIM. A	DIM. B	DIM. C	DIM. D

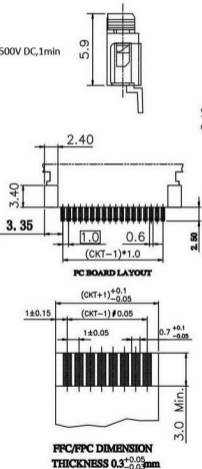

C3916-XXUTX100R



C3916-XXBTX100R

RoHS
Compliant

SEMICON
TRADE

SEMICON TRADE, s.r.o.
 Volavova 252/118
 158 00 Praha 5
 Czech Republic
 www.semicon.cz
 semicon@semicon.cz
 tel: +420 251 625 331, 332, 377
 fax: +420 251 625 252, 393

APPROVED 核准
 DWG. 圖號 Betty
 DATE 製圖日 2015/03/05
 SCALE 比例 1:1
 UNIT 單位 MM
 PAGE 頁數 1 OF 1

TOLERANCE 容許公差
 ∅ ± 0.30
 (∅) ± 0.20
 ANG. ± 3°
 SIZE 尺寸 A4
 REV. 版本 C

PART NAME 品名
 FPC/FFC ZIF 1.0mm SMT TYPE
 HORIZONTAL TYPE XXP
 TIN PLATING IVORY COLOR ROHS
 PART NO.
 料號 C3916-XX(U,B)TX100R

K#C3916-26UTT101