


Kcr PAW2400-xx Sn

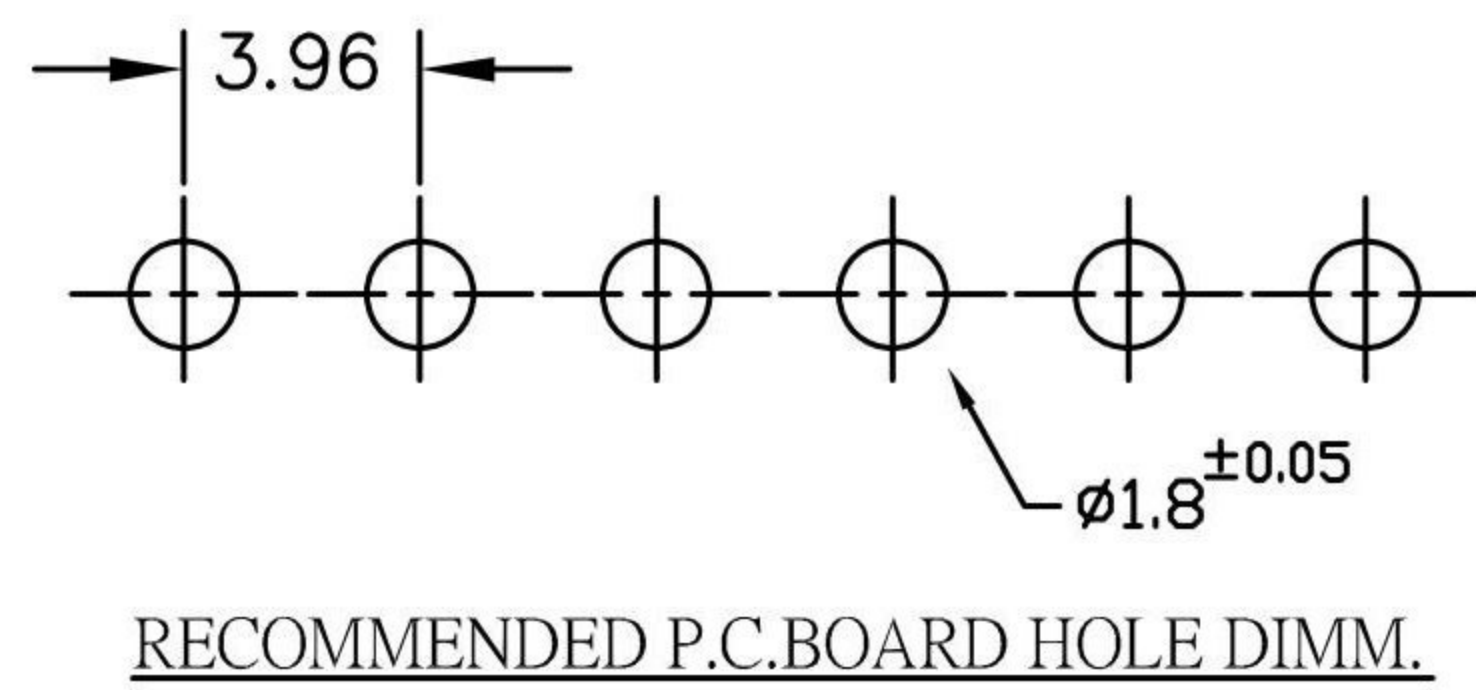

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ / min.

Dielectric Withstanding Voltage: 1500V AC / min.

Contact Resistance: 10mΩ / max.

Material

Insulator : Nylon66, UL94V-2

Terminal : Brass / Tin-Plated

Poles	Dimension mm (in.)	
	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

RoHS
Compliant

SEMIC
T R A D E

SEMIC TRADE, s.r.o.
Volutová 2521/18
158 00 Praha 5
Czech Republic

www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377
fax: +420 251 626 252, 393

APPD.
核准
Betty

DWG.
製圖
Betty

DATE 制表日
2012/04/20



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ± 0.5
.00 ± 0.35
ANG. ±

SIZE.
紙張尺寸 A 4

REV.
版次 B

PART NAME 品名
3.96mm WAFER STRAIGHT TYPE
1XXXP WITH LOCKING RIBS
TIN PLATED WHITE COLOR ROHS

PART NO.
料號 W2400-XXPSYTW0R