


## Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon 66
- Tin-plated brass pin
- .025"(0.64mm) square pin

## Specifications:

- Current rating: 3A
- Voltage rating: 250V AC, DC
- Contact resistance: 20mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

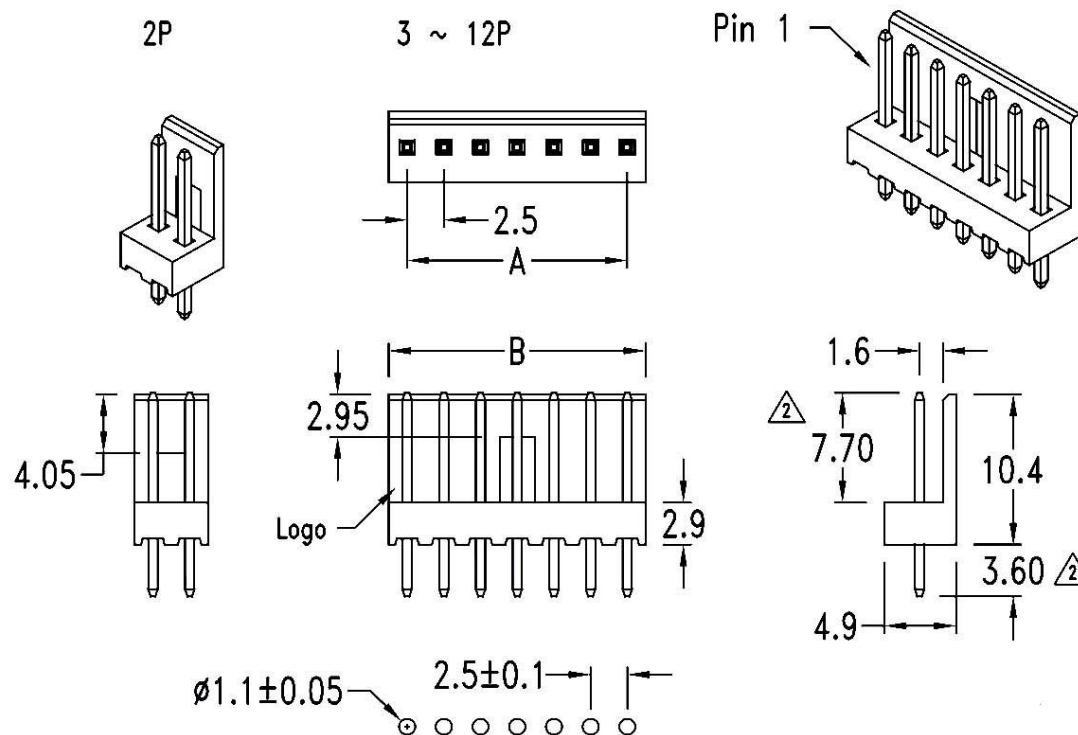

## Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	5.0	5	10.0	12.5	8	17.5	20.0	11	25.0	27.5
3	5.0	7.5	6	12.5	15.0	9	20.0	22.5	12	27.5	30.0
4	7.5	10.0	7	15.0	17.5	10	22.5	25.0			

Kcr PAW2490-xx Sn



SEMIC TRADE, s.r.o.  
Volutová 2521/18  
158 00 Praha 5  
Czech Republic

[www.semic.cz](http://www.semic.cz)  
[semic@semic.cz](mailto:semic@semic.cz)  
tel.: +420 251 625 331, 332, 377  
fax: +420 251 626 252, 393

APPD.  
核准 Betty

DWG.  
製圖 Lena

DATE 制表日  
2021/7/16



SCALE  
比例 參考

UNIT  
單位 MM

TOLERANCE  
容許公差

SIZE.  
紙張尺寸 A4

REV.  
版本 C

PART NAME 品名  
2.5mm WAFER XXP STRAIGHT TYPE W/LOCKING  
RIB TIN PLATED WHITE INSULATOR ROHS

PART NO.  
料號 W2490-XXPSTW00R