

## FEATURES AND SPECIFICATIONS

## Features and Benefits

Size 2 to 12 circuits

## Electrical

Current Rating: 3A AC, DC

Voltage Rating: 250V AC/ max.

Insulation Resistance:1000M $\Omega$  / min.

Dielectric Withstanding Voltage: 1500V AC/ min.


Contact Resistance: 10mΩ/ max.

Operating Temp.: -25 °C ~ +85 °C

## Physical

Material: Nylon 66, UL94V-2

Terminal Material: Brass/ Tin-plated

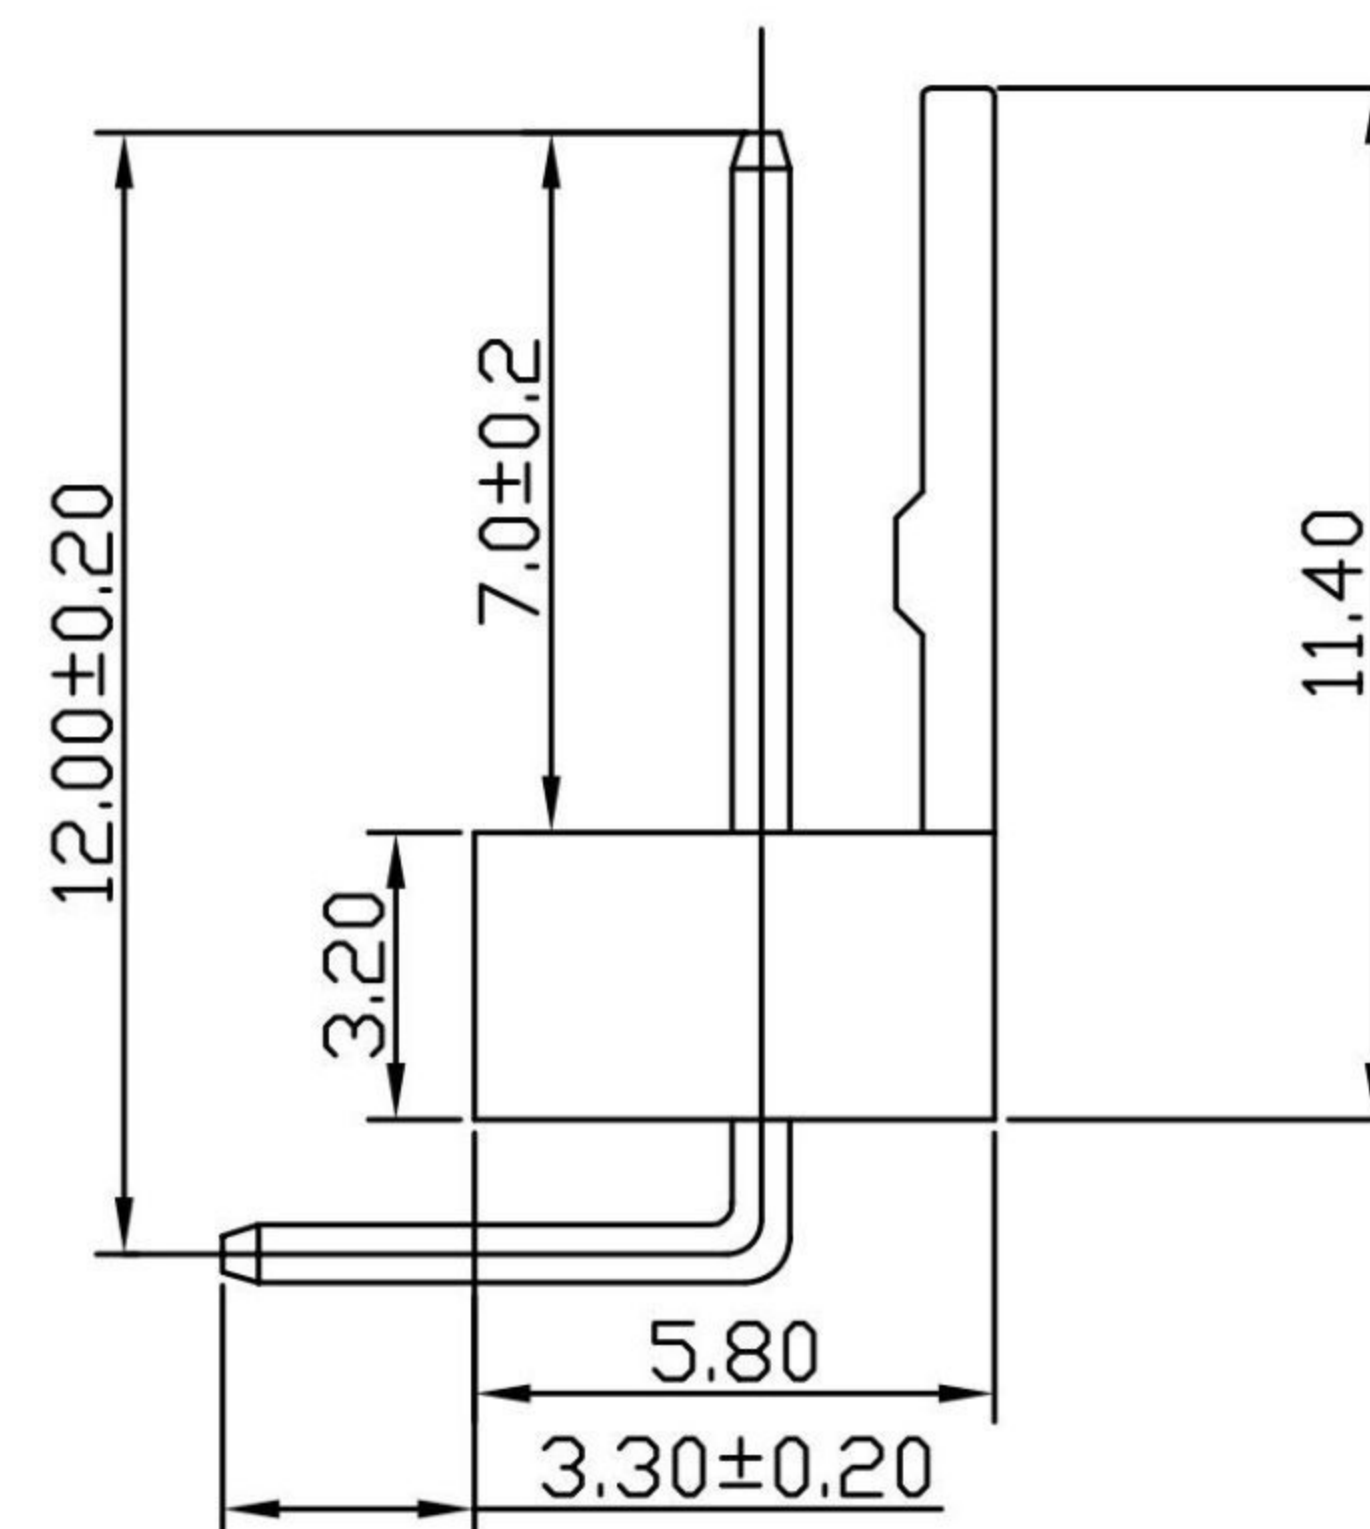

Kcr PAWC2600-xx

Poles	Dimension mm (in.)	
	A	B
2	2.54(0.100)	5.12(0.202)
3	5.08(0.200)	7.66(0.302)
4	7.62(0.300)	10.20(0.402)
5	10.16(0.400)	12.74(0.502)
6	12.70(0.500)	15.30(0.602)
7	15.24(0.600)	17.94(0.706)
8	17.78(0.700)	20.48(0.806)
9	20.32(0.800)	23.02(0.906)
10	22.86(0.900)	25.58(1.007)
11	25.40(1.000)	28.12(1.107)
12	27.94(1.100)	30.68(1.208)

NOTE:  
TOLERANCE:  
2P~9P  $\pm 0.20$   
10~12P  $\pm 0.30$

RoHS  
Compliant



SEMIC TRADE, s.r.o.

Volutová 2521/18

158 00 Praha 5

Czech Republic


[www.semic.cz](http://www.semic.cz)

semic@semic.cz

tel.: +420 251 625 331, 332, 377

fax: +420 251 626 252, 393

APPD.  
核准 HELEN



TOLERANCE	容許公差
-----------	------

.0	$\pm 0.35$
----	------------

	.00	$\pm 0.25$
--	-----	------------

ANG.	ANG.±
------	-------

SIZE.  
紙張尺寸

紙張尺寸	1
------	---

REV. 11/5/84

1	版次
---	----

PART NAME	品 名
-----------	-----

2.54mm WAFER XXP REVERSE  
RIGHT ANGLE TYPE BEIGE COLOR(V2)  
WITH LOCKING RIBS TIN PLATED ROHS

PART NO.

料 號	W2600-XXPCYTC0R
-----	-----------------

