

Features:

- 2 ~ 24 circuits available
- Pin: Brass. TIN PLATING
- Material: UL94-V2
- Positive housing locks
- Mates with H5150 housing
- Recommended PCB thickness: .07"(1.78mm) Max.

Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C
(including temperature rise)


Ordering and Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	10	16.8	22.2	18	33.6	39.0
4	4.2	9.6	12	21.0	26.4	20	37.8	43.2
6	8.4	13.8	14	25.2	30.6	22	42.0	47.4
8	12.6	18.0	16	29.4	34.8	24	46.2	51.6

Kcr PAWR4505-XXx2

Current rating and wire size:

Wire Size AWG	Circuits			
	2	4, 6	8, 10	12~24
# 18	9 A	8 A	7 A	6 A
# 20	7 A	6 A	5 A	5 A
# 22	5 A	4 A	4 A	4 A
# 24	4 A	3 A	3 A	3 A

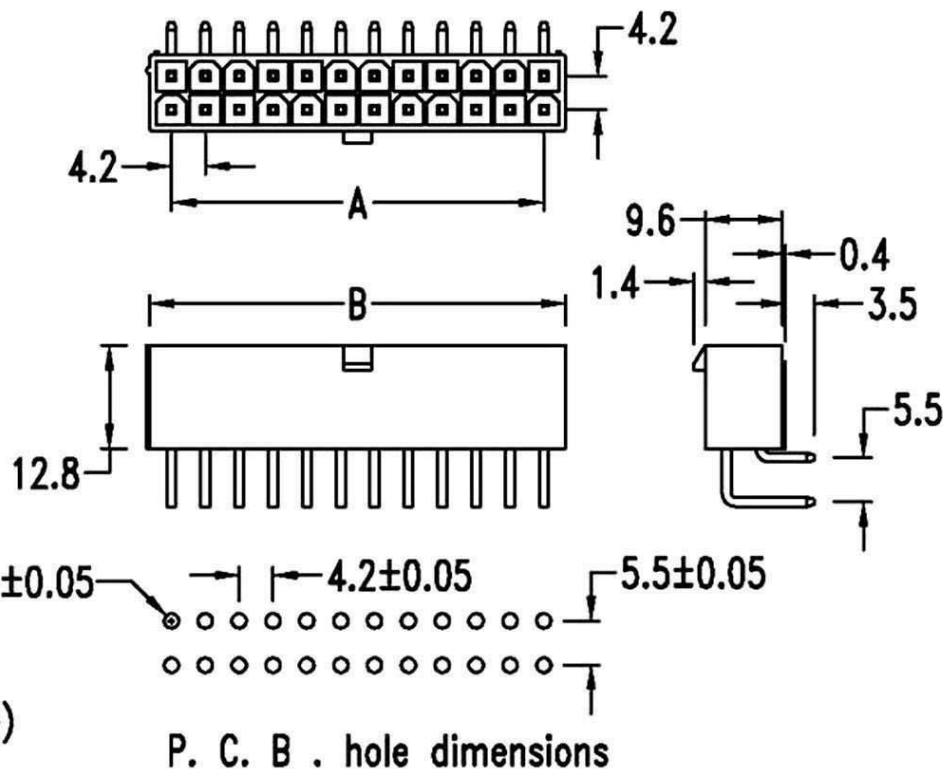

RoHS
Compliant

SEMIC
TRADE

SEMIC TRADE, s.r.o.
Volutova 2521/18
158 00 Praha 5
Czech Republic

www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377
fax: +420 251 626 252, 393

APPD.
核准
DWG.
製圖
Helen
DATE 制表日
2015/6/25

SCALE
比例
UNIT
單位
PAGE
張數
TOLERANCE
容許公差
SIZE
紙張尺寸
REV.
版本

PART NAME 品名
4.2mm WAFER RIGHT ANGLE TYPE 2X??P WITHOUT
EAR WITHOUT PLOARIZING PEG TIN PLATED
PLATED WHITE COLOR UL 94V-2 ROHS
PART NO.
料號 W4505-XXPDRBTWR