
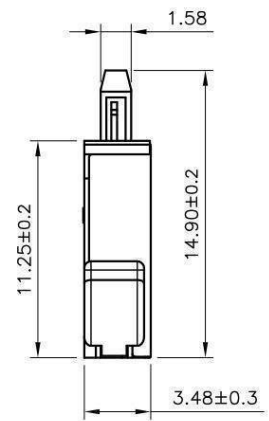


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

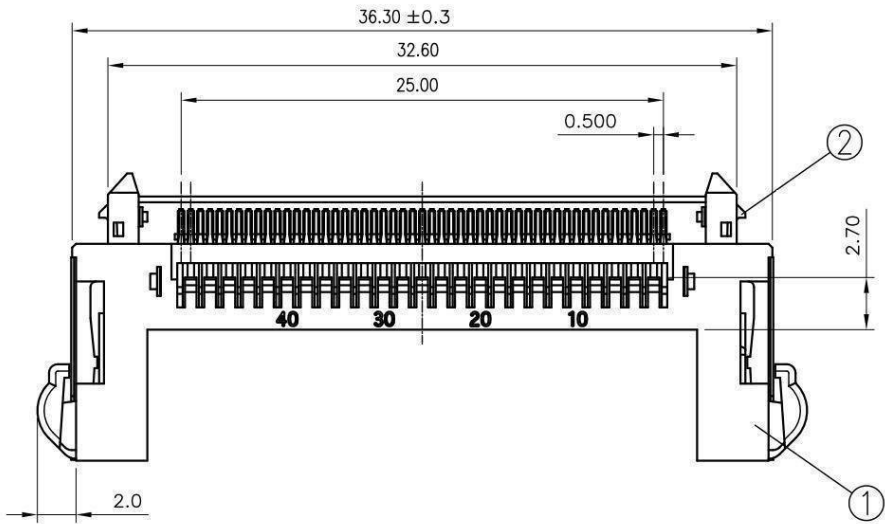




■ HOUSING

- Pitch: 0.5mm(0.02")
- Material:
- ① Housing: Thermal Plastic, UL 94V-0
- ② Lock spring: Stainless steel
- ③ Shell: Stainless steel
- Accepts Terminal : T1005-GPOA0000R
T1005-GPOB0000R

Kcr PXH1005-51

■ SPECIFICATIONS

Item	Standard	
Rated Voltage (Max)	200 V	【AC/DC】
Rated Current (Max)	0.8 A	
Ambient Temperature Range	-40°C ~ +80°C	
Contact Resistance (initial)	Initial : 40 mΩ Max. After test: Δ40 mΩ Max.	
Insulation Resistance (initial)	100 MΩ Min.	
Withstanding Voltage	500V AC for 1 minute	

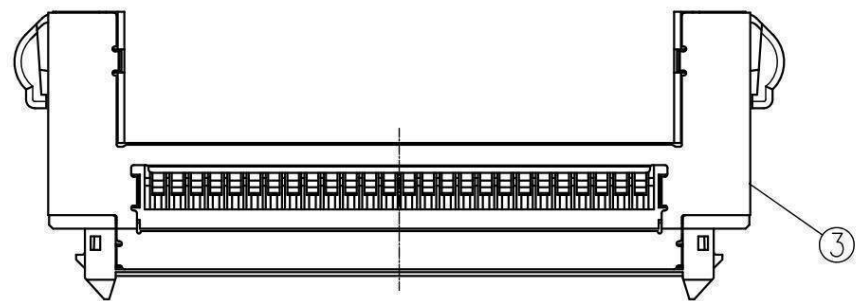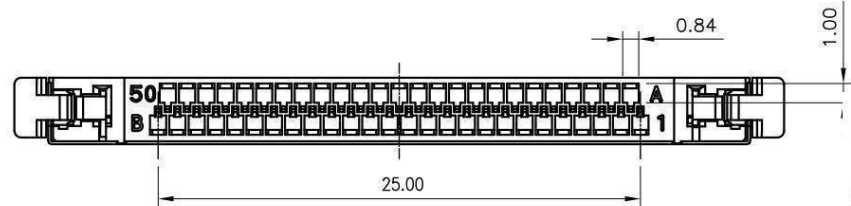

RoHS
Compliant



SEMIC TRADE, s.r.o.
Volutová 2521/118
158 00 Praha 5
Czech Republic
www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377
fax: +420 251 626 252, 393

APPD.
核准 BETTY
DWG.
製圖 KAREN
DATE 制表日
2015/08/06

TOLERANCE
容許公差
.0 ± 0.3
.00 ± 0.15
ANG. ±
UNIT
單位 MM
PAGE
張數 1 OF 1

PART NAME 品名
0.5mm LVDS HOUSING 51P WITH LOCK SPRING
BLACK COLOR (FREE HALOGEN) MATERIAL :
NYLON 46 UL94-V0 ROHS
PART NO.
料號 H1005-51PYB000H

1 2 3 4 5 6 7 8