

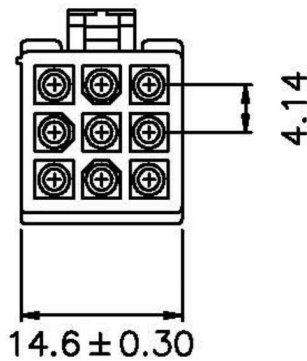
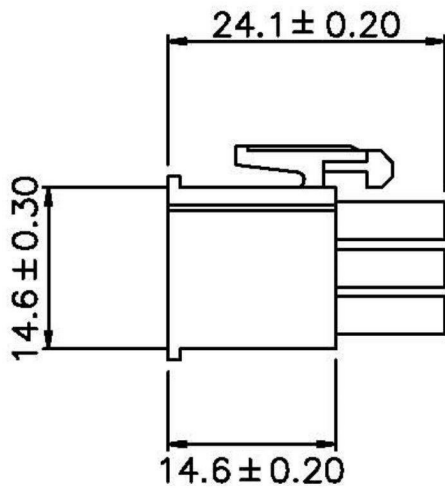


Kcr PXH1110-XXx3 &HS

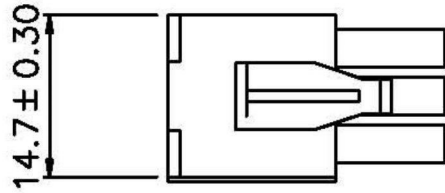

Specifications:

- Material: Polyester, UL 94V-2
- Voltage Rating: 300V
- Current Rating: 5A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10m max.
After environmental testing/20mΩ max.
- Applicable Wire:AWG#18 TO #24

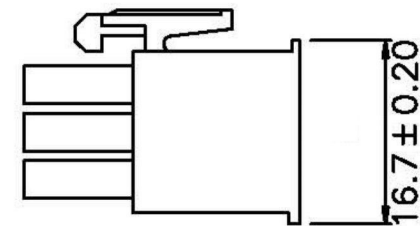

APPD. 核准 HELEN			TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 φ 1.0mm MALE HOUSING 3X3P UL94V-2 MATERIAL WHITE COLOR ROHS
DWG. 製圖 ABBY				
DATE 制表日 2012/09/03		PAGE 張數 1 OF 1	REV. 版次 B	PART NO. 料號 H1110-09PTAW00R

RoHS
Compliant



Semic Trade, s.r.o.
Volutová 2521/18
158 00 Praha 5
Czech Republic
www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377