


1 2 3 4 5 6 7 8

A

A



Specifications:

Material: Polyester, UL 94V-2, UL 94V-0
 Voltage Rating: 300V
 Current Rating: 5A
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25°C~+85°C
 Contact Resistance: Initial value/10m max.
 After environmental testing/20mΩ max.
 Applicable Wire:AWG#18 TO #24

B




B

C

C

D

D

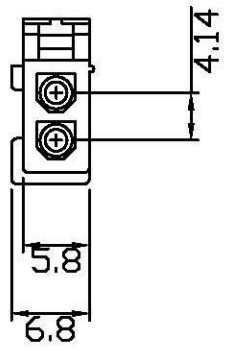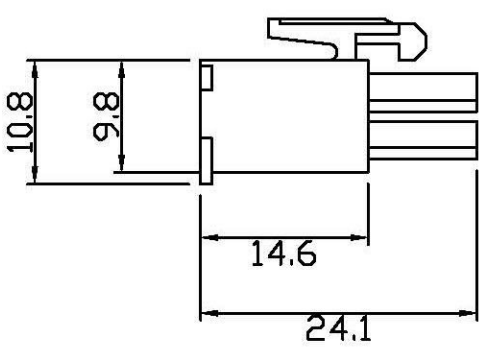

E

E

F

F

Kcr PXH1110-xx

G

G

H

H

APPD. 核准 HELEN DWG. 製圖 ABBY DATE 制表日 2011/05/19		TOLERANCE 容許公差 0 ± .00 ± ANG. ± UNIT 單位 M M PAGE 張數 1 OF 1		TOLERANCE 容許公差 0 ± .00 ± ANG. ± SIZE 紙張尺寸 A 4 REV. 版本 B		SEMIC TRADE, s.r.o. Volutová 2521/18 158 00 Praha 5 Czech Republic www.semic.cz semic@semic.cz tel.: +420 251 625 331, 332, 377 fax: +420 251 626 252, 393	
PART NAME 品名 φ 1.0mm MALE HOUSING 1X2P UL94V-X MATERIAL WHITE COLOR LOW-LEAD				PART NO. 料號 H1110-02PSXW00R			

1 2 3 4 5 6 7 8