
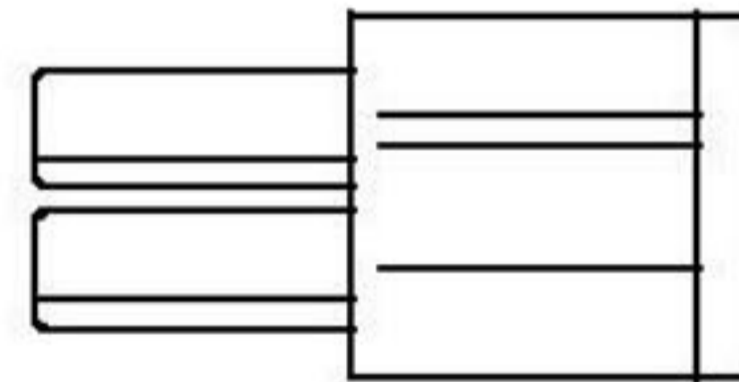
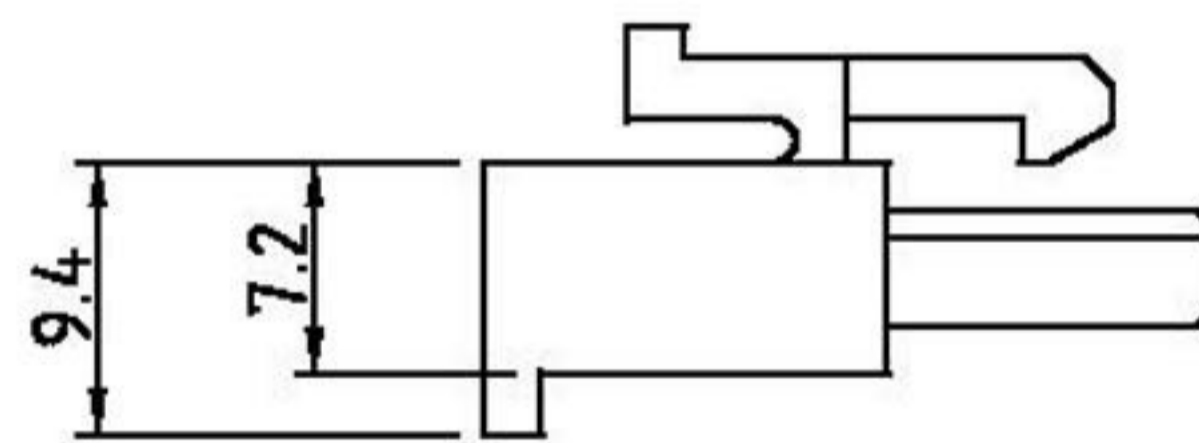
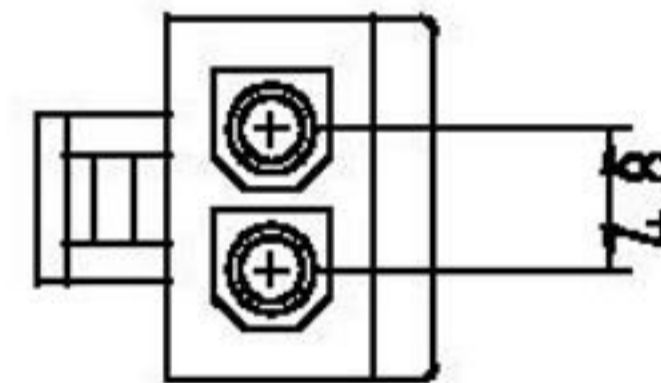


Kcr PXH4801-02

Specifications:

Material: Polyester, UL 94V-2
 Voltage Rating: 250V
 Current Rating: 6A
 Withstand Voltage: 1500V AC/Minute
 Insulation Resistance: 1000MΩ min.
 Temperature Range: -25°C~+85°C
 Contact Resistance: Initial value/10m max.
 After environmental testing/20mΩ max.
 Applicable Wire:AWG#18 TO #24

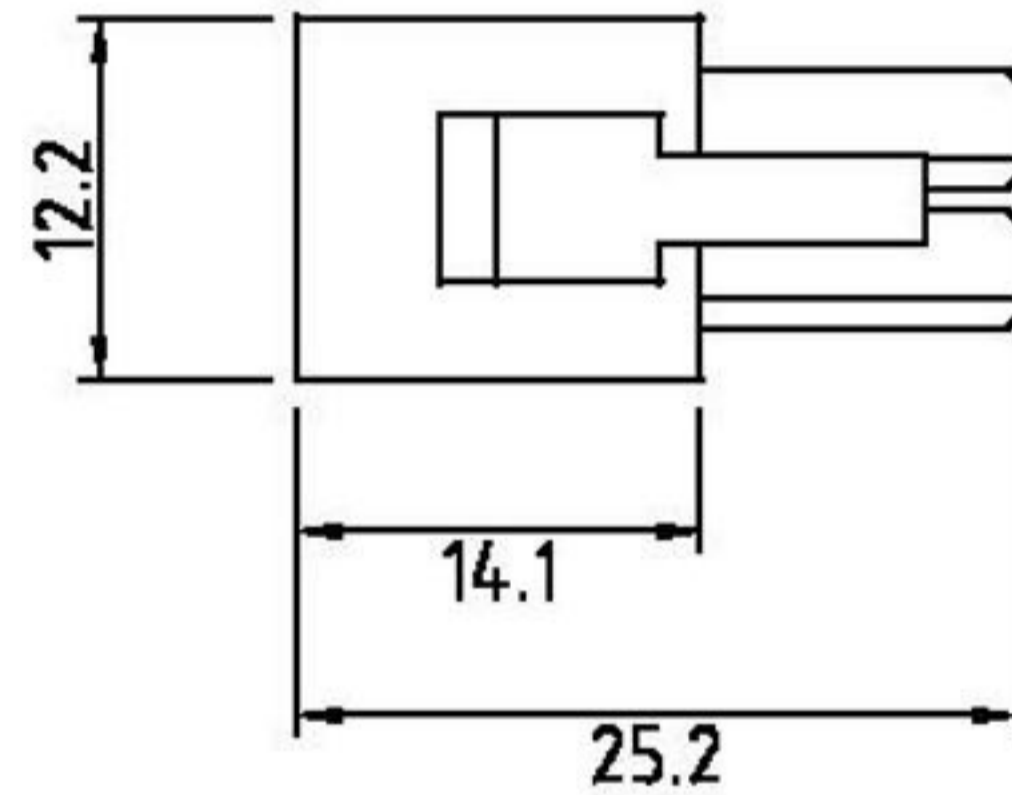

APPD. 核准 DWG. 製圖 <i>Helen</i> DATE 制表日 2012/8/6		SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1		TOLERANCE 容許公差 .0 ±0.25 .00 ± ANG. ± SIZE 紙張尺寸 A4 REV. 版本 A		SEMIC TRADE, s.r.o. Volutová 2521/18 158 00 Praha 5 Czech Republic www.semic.cz semic@semic.cz tel.: +420 251 625 331, 332, 377 fax: +420 251 626 252, 393	
PART NAME 品名 4.8mm MALE HOUSING 1X2P WHITE INSULATOR NYLON66 UL94-V2 ROHS				PART NO. 料號 H4801-02MSW000R			

RoHS
Compliant

