

**Features:**



- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black

**Specifications:**

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.  
(carry rated current load)

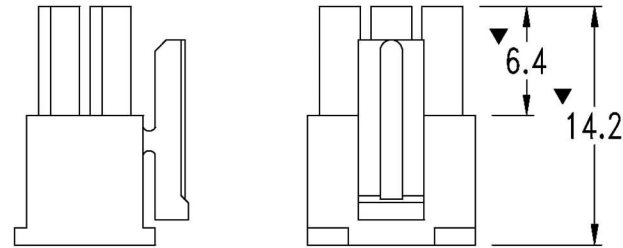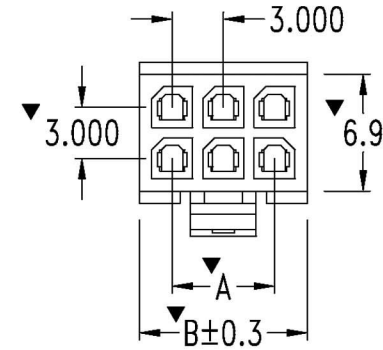

**Dimensional Information**

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	6	6.0	10.0	10	12.0	16.0	14	18.0	22.0	18	24.0	28.0	22	30.0	34.0
4	3.0	7.0	8	9.0	13.0	12	15.0	19.0	16	21.0	25.0	20	27.0	31.0	24	33.0	37.0

**Kmf H4130-xx**

**RoHS  
Compliant**

**SEMIC**  
TRADE

SEMIC TRADE, s.r.o.  
Volutová 2521/18  
158 00 Praha 5  
Czech Republic  
www.semic.cz  
semic@semic.cz  
tel.: +420 251 625 331, 332, 377  
fax: +420 251 626 252, 393

APPD.  
核准

DWG.  
製圖

DATE 制表日

2012/11/20

Hedy



SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 / 1

TOLERANCE  
容許公差  
.000 ± 0.05 (mm)  
.00 ± 0.15 (mm)  
.0 ± 0.25 (mm)

SIZE.  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名

MICRO-FIT 3.0 MALE HOUSING  
2XXXP BLACK INSULATOR ROHS

PART NO.

料號 H4130-XXPDB000R