

# Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin

# Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

# Ordering Information

Part No.	Feature
W4230-XXPDCXBXR	With solderable retention clip
W4230-XXPDDXBXR	With solderable fitting nail


&& xx = 02 ~ 24

# Dimensional Information



Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

Kmf W4230-XX


W4230-XXPDCXBXR

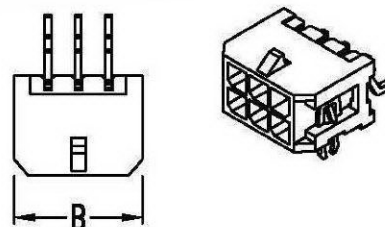

W4230-XXPDDXBXR

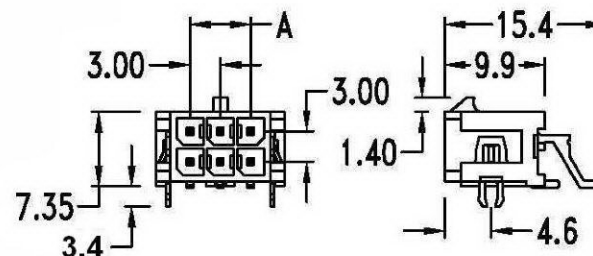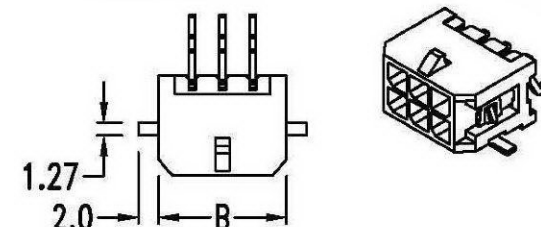

PCB Layout: Component side

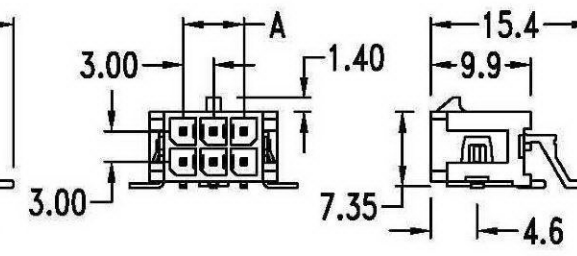

PCB Layout: Component side



SEMIC TRADE, s.r.o.  
Volutová 2521/18  
158 00 Praha 5  
Czech Republic  
www.semic.cz  
semic@semic.cz  
tel.: +420 251 625 331, 332, 377  
fax: +420 251 626 252, 393

APPD.  
核准  
DWG.  
HELEN  
DATE  
2009/12/17

SCALE  
比例  
UNIT  
M M  
PAGE  
1 OF 1

PART NAME 品名  
MICRO-FIT 3.0 DOUBLE ROW WAFER 2XXXP SMT 90°  
TYPE BLACK INSULATOR W/ SOLDERABLE RETENTION  
CLIP or W/SOLDERABLE FITTING NAIL  
PART NO.  
料號 W4230-XXPD(D,C)TBXR