

Krj12 Z6/6DNGF1BNR C57




Type: FB-23-02 5321 6p
 Product Name: PCB JACK
 Description: ELECTRICAL
 CURRENT RATING:1.5AMPS

VOLTAGE RATING:125VAC

INSULATION RESISTANCE:100MEGOHMS MINI

WITHSTAND VOLTAGE:AC 1000V RMS 50Hz or 60Hz 1 MIN

CONTACT RESISTANCE:20MILLMHOS MINI

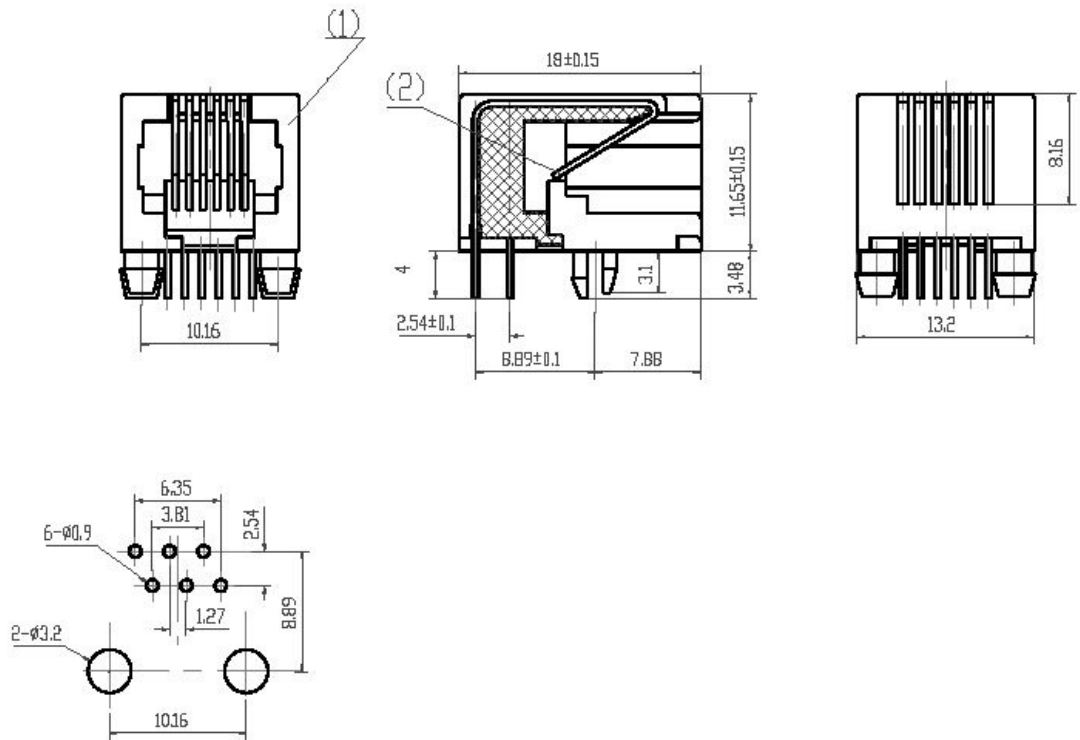

MECHANICAL

INSERTION FORCE: 2 CONTACTS..350g 4 CONTACTS..500g
 6 CONTACTS..750g 8 CONTACTS..900g
 10 CONTACTS..1050g

RETENTION STRENGTH: 7.7Kg BETWEEN JACK AND PLUG

CRIMP TENSILE STRENGTH: 2.27Kg

DURABILITY: 750 MATING CYCLES MIN

MATERIAL

HOUSING: 1) ABS RESIN (UL94V-0) 2) GLASS FILLED PBT (UL94V-0)

CONTACT WIRE: 1) 0.45mm DIA PHOSPHOR BRONZE GOLD

PLATING OVER NICKEL

2) 0.35mm THICKNESS PHOSPHOR BRONZE

ALLOY SELECTIVE GOLD PLATING OVER NICKEL

SHIELDING: 0.25mm THICKNESS COPPER ALLOY WITH TIN PLATED

GOLD PLATING: 3 INCH, 6 INCH, 15 INCH, 30 INCH, 50 INCH