


Kusb 8319B-4P WH

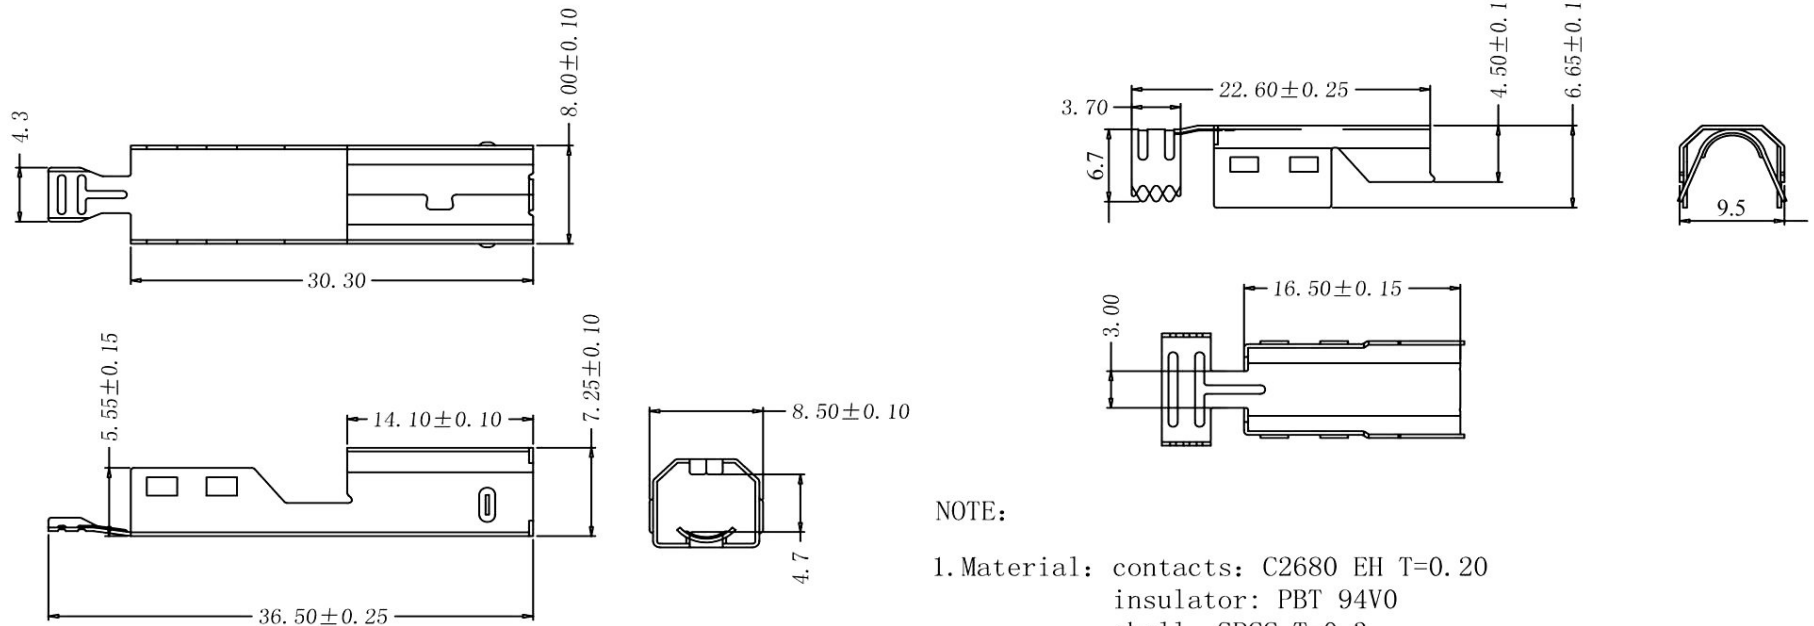

NOTE:

- 1. Material: contacts: C2680 EH T=0.20
- insulator: PBT 94V0
- shell: SPCC T=0.3

NOTE:

- 1. MATERIAL:
 - a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
 - b. CONTACT: BRASS T=0.25mm
(SURFACE PLATING: Au* μ " + Sn100 μ " + Ni50 μ ")
SEE ORDERING INFORMATION
 - c. CRUST: T=0.25mm
(SURFACE PLATING: Ni80 μ " ~ 100 μ ")
SEE ORDERING INFORMATION
- 2. ELECTRIC:
 - a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - d. OPERATING TEMPERATURE: -55° C ~ +85° C



SEMIC TRADE, s.r.o.
 Volutová 2521/18
 158 00 Praha 5
 Czech Republic

www.semic.cz
semic@semic.cz
 tel.: +420 251 625 331, 332, 377
 fax: +420 251 626 252, 393

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	SCALE 比例	0 ± 0.25 .00 ± ANG. ±	
DATE 制表日	Helen	UNIT 單位	USB B TPYE 4P MALE SOLDER TYPE ROHS
2015/4/1		MM	
PAGE 張數	1 OF 1	REV. 版本	PART NO. 料號
		B	C8319-04BMSXX0R