




Semic Trade, s.r.o., Volutová 2521/18, 158 00 Praha 5
Telephone: +420 251 625 331, 251 625 332, 251 625 377
GSM: +420 605 999 994 Fax: +420 251 626 252, 251 626 393





www.semic.cz
semic@semic.cz




DATE	DESCRIPTION	REV.
2.25.10	CHANGE AS PER ECN 10-017	A
6.01.11	CHANGE AS PER ECN 11-077	B
11.05.12	CHANGE AS PER ECN 12-155	C
2.20.13	CHANGE AS PER ECN 13-019	D




Top Shell

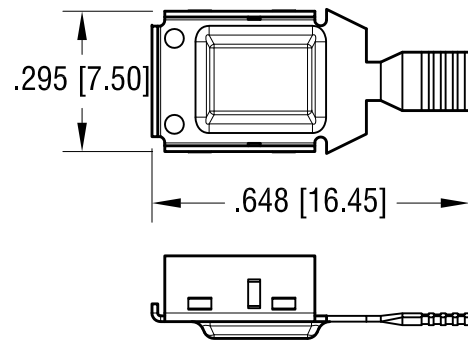


Insulator Body

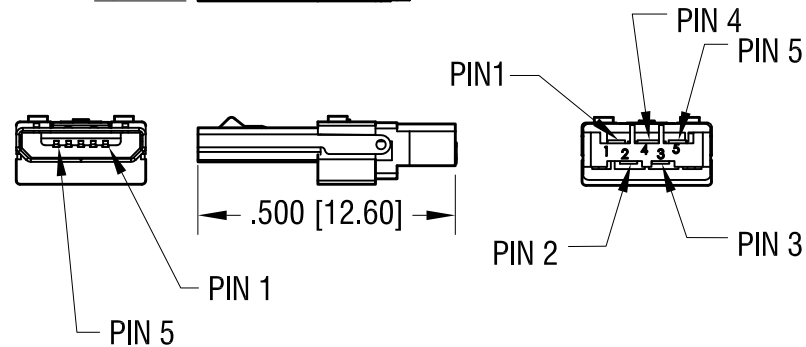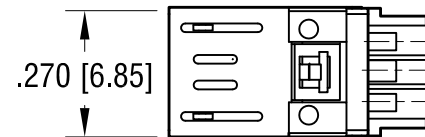

Bottom Shell

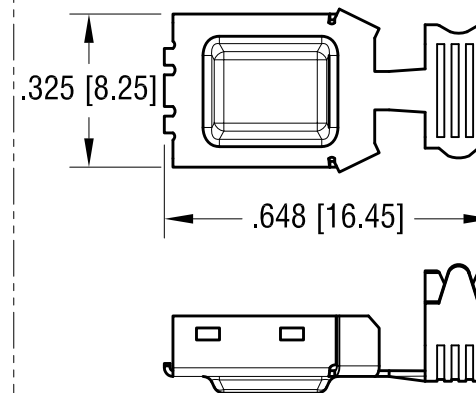

Supplied Unassembled

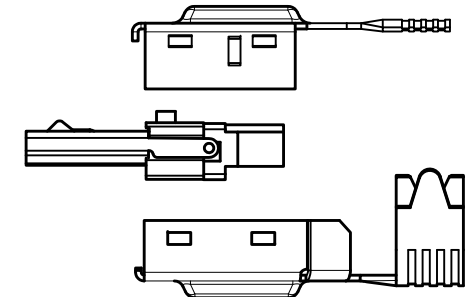

Notes:

Materiall:

Shell: Steel, Nickel Plate.

Insulator: PBT, UL 94-V0 (Color Black)

Contacts: Phosphor Bronze

Finish:

Contact Area: Gold Plate over Nickel Plate
on Solder Tail: Tin Plate over Nickel Plate

Electrical Specifications

Rated Voltage: 30V AC (rms)


Contact Current Rating: 1.5 Amp

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding: 100V AC

Operating Temperature: -30°C to 85°C

ACTUAL SIZE



THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

PART NAME					
MICRO USB PLUG					
MATERIAL					
AS NOTED					
FINISH			DRN BY		DATE
			NT		11.23.09
AS NOTED			APP'D		SCALE
					2.5X
TOLERANCES			INCH	[MM]	DWG NO.
DECIMAL			± .010	[± 0.25]	
ANGULAR			± 1°		
UNLESS OTHERWISE SPECIFIED					
			CODE	941	
			C		