





Kxc 2.54# 1K Z/Au 7058

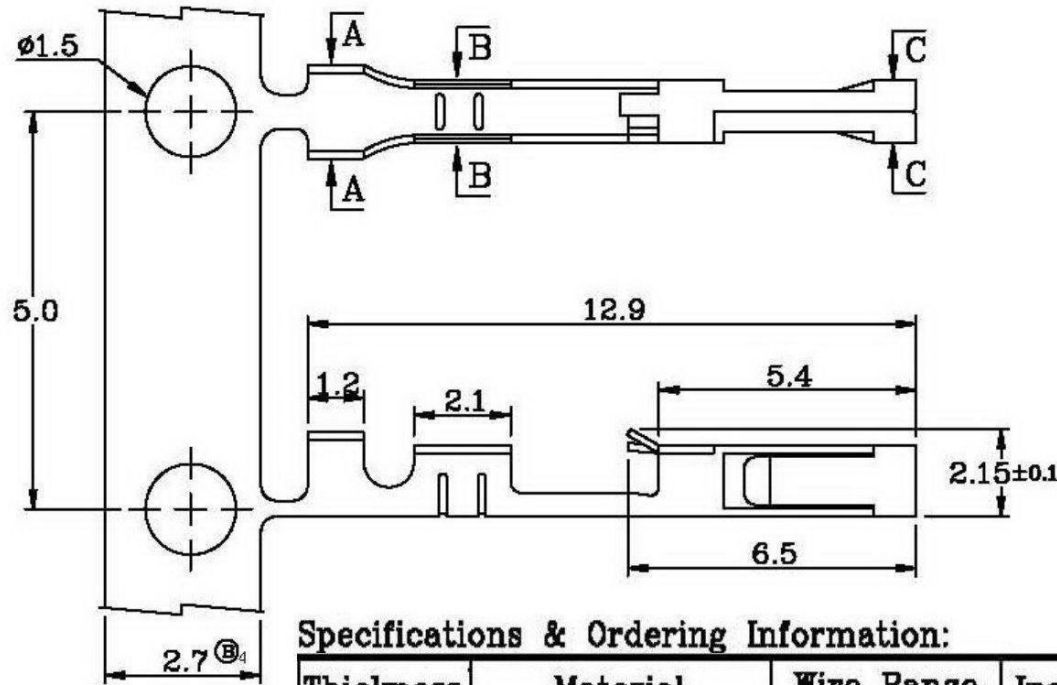

Specifications & Ordering Information:

Thickness	Material	Wire Range	Insulation O.D.	Finish	Qty/reel
0.2	Phosphor Bronze	AWG #24~30	1.4-1.1 mm	T: TIN PLATED	15,000PCS
				S: SELECTIVE GOLD PLATED	
				H: SELECTIVE GOLD 15u" PLATED	

Plating Notes:

"T" Tin plating: 60u" Tin over 50u" Nickel on entire contact.

"S" Selective gold plating: 1U" gold on contact area, all over Nickel on entire contact.

"H" Selective gold plating 15U": 15U" gold on contact area, all over Nickel on entire contact.



SEMIC TRADE, s.r.o.
 Volutova 2521/18
 158 00 Praha 5
 Czech Republic
www.semic.cz
semic@semic.cz
 tel.: +420 251 625 331, 332, 377
 fax: +420 251 626 252, 393

APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	HELEN	0.0 ± 0.25 0.00 ± 0.13 ANG. ±	2.54mm TERMINAL PHOSPHOR BRONZE MATERIAL 24~28AWG 1ROLL=15000PCS ROHS LOW-LEAD
DATE 制表日	UNIT 單位	SIZE. 線徑尺寸	PART NO.
2010/10/27	MM	A4	料號 T7058-XPL00000R
PAGE 張數	1 OF 1	REV. 版本	A