

Kxd 1.27#xxSG-4833S

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 25/06/05		

NOTES:

- SPECIFICATIONS
 - Current Rating: 1A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 30mΩ Max
 - Operating Temperature: -40°C to +105°C




- MATERIALS
 - Contact Material: Copper alloy
 - Insulator: Thermoplastic(UL94 V-0).

3.PART NUMBER: DS1065-01

4.PRODUCT NUMBER CODE:

DS1065-01 - X X X X X

- X MOUNTING TYPE
V:V/T TYPE
- X HOUSING COLOR
B:BLACK
- X CONTACT PLATING
8: FULL GOLD FLASH
- X CONNECTOR TYPE
S:SOCKET
- X No.OF CONTACTS
1*1-1*40

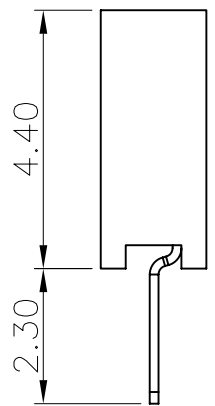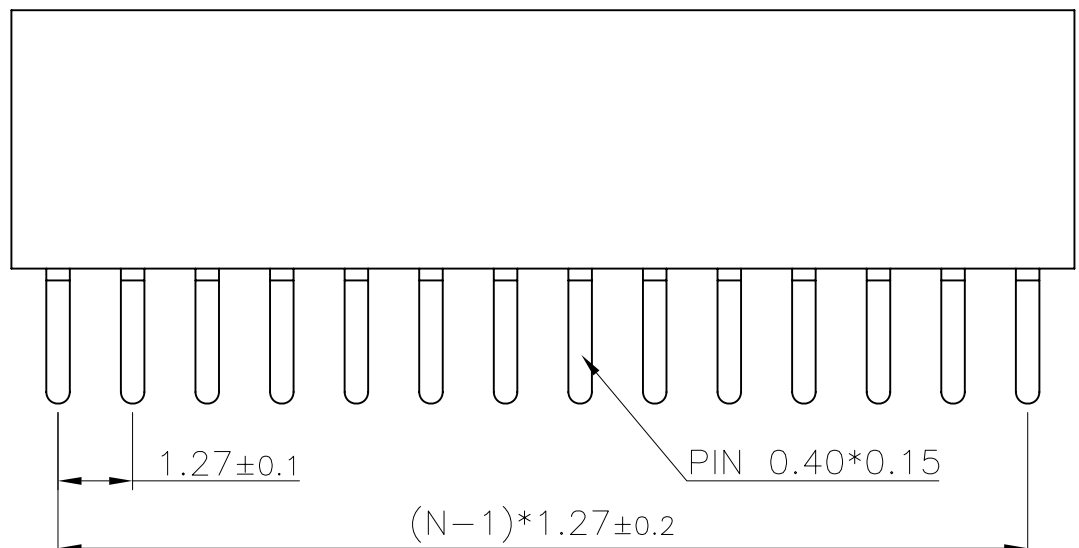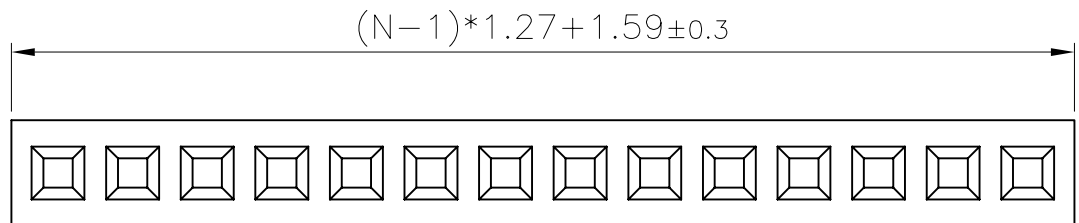

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 1.27mm TYPE
X.	±0.60	X.	±5°	UNITS	mm	SINGLE ROW V/T TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-01
.XX	±0.25	.XX	±2°	SEMIC TRADE, s.r.o. www.semic.cz Volutová 2521/18 semic@semic.cz 158 00 Praha 5 tel.: +420 251 625 331, 332, 377 Czech Republic fax: +420 251 626 252, 393			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1065-01-XXXXX					