


# Kxl 2.54 # xxCG 2100S

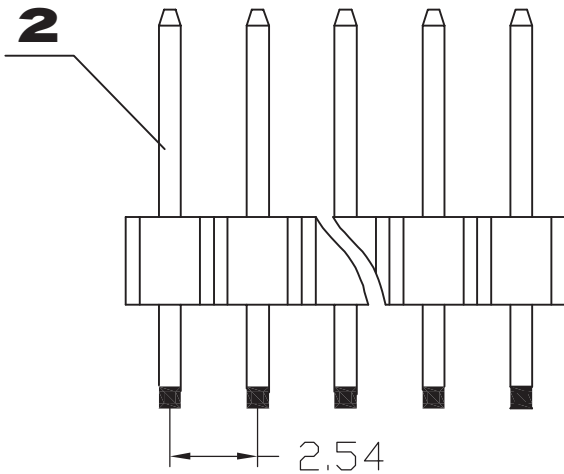


## Specifications:

Contact Resistance:  $30\text{m}\Omega$  max.at DC 100 mA  
Insulator Resistance:  $1000\text{M}\Omega$  min.at DC 500V  
Current Rating: 1 AMP

## Dielectric Withstanding

Voltage: AC 500V For 1 minute  
Operating Temperature:  $-55^{\circ}\text{C}$ --- $+105^{\circ}\text{C}$   
Contact: Brass  
Housing: PA66

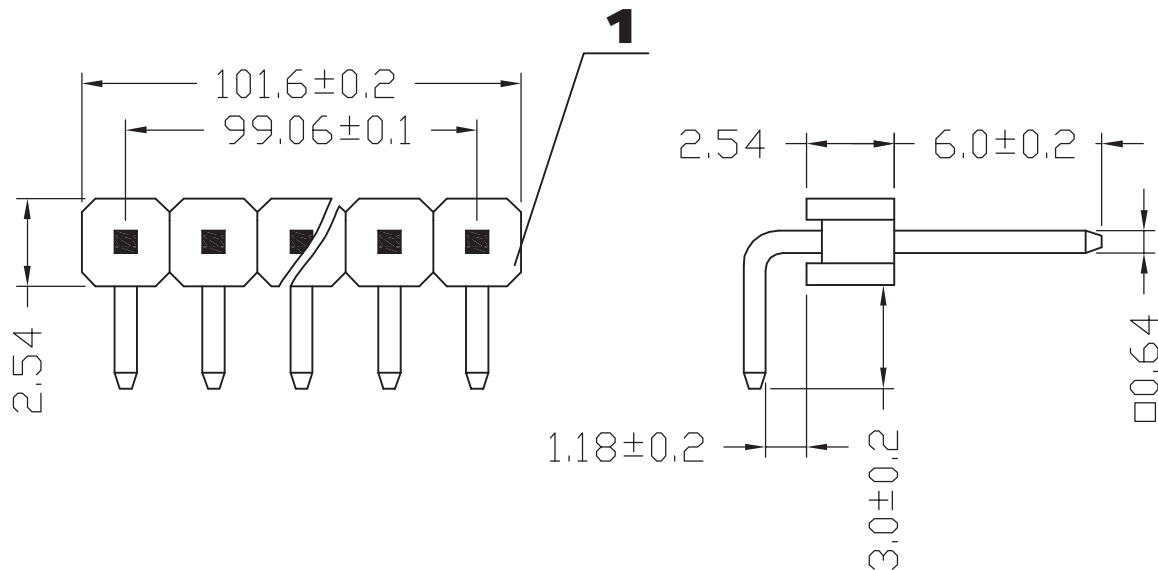

Semic Trade, s.r.o.  
Volutová 2521/18  
158 00 Praha 5  
Czech Republic

[www.semic.cz](http://www.semic.cz)  
[semic@semic.cz](mailto:semic@semic.cz)  
tel.: +420 251 625 331, 332, 377