
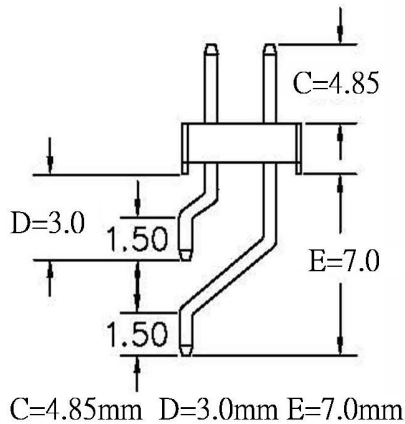


MATERIAL
HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION
CURRENT: 1A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
DIELECTRIC STRENGTH : 1000 VAC MIN
DURABILITY : 100 CYCLES
RETENTION FORCE : 700g MIN

RECOMMENDED P.C.B LAYOUT

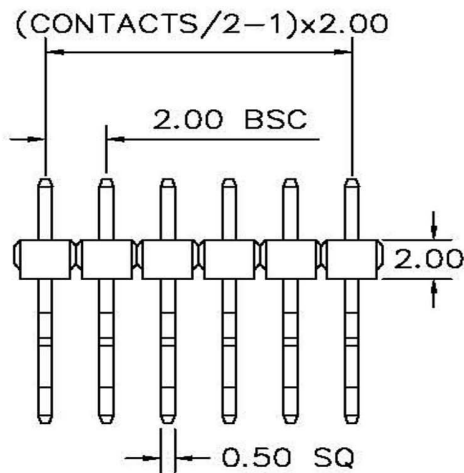

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

Kxl: 2.00#xxSG-6201DT

RoHS
Compliant

SEMIC
TRADE

SEMIC TRADE, s.r.o.
Volutova 2521/18
158 00 Praha 5
Czech Republic
www.semic.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377
fax: +420 251 626 252, 393

APPD.
核准

DWG.
製圖 Helen

DATE 制表日
2014/6/23



SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

.0 ±0.38
.00 ±0.25
ANG. ± 5°

SIZE.
紙張尺寸 A4

REV.
版次 A

PART NAME 品名
2.0mm PIN HEADER DUAL ROW HORIZONTAL SMT
H=4.0mm 2X??P GOLD FLASH C=4.85 D=3.0 E=7.0mm
PAD+REELPACKING ROHS
MATERIAL:NYLON 6T

PART NO.
料號 C6201-XXBDGATXR