

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, as per IEC standards.

Effective Parameters irrespective of material grade (per set)


Parameter	Value	Unit
Effective Length (L_e):	265	mm
Effective Area (A_e):	228	mm ²
Effective Area (A_{min}):	225	mm ²
Effective Volume (V_e):	60420	mm ³
Approximate weight(m):	302	g/set



UU6015 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL, N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	μ_e Approx./Set	P_v (W/set) (25kHz,200mT, 100°C)	P_v (W/set) (100kHz,100mT, 100°C)	P_v (W/set) (100kHz,200mT, 100°C)	Ordering Code
CF139	2100±20%	2100 +30%/-20%	≈1946	≤ 8.15	≤ 6.04	≤ 34.74	CF139UU6015 OL

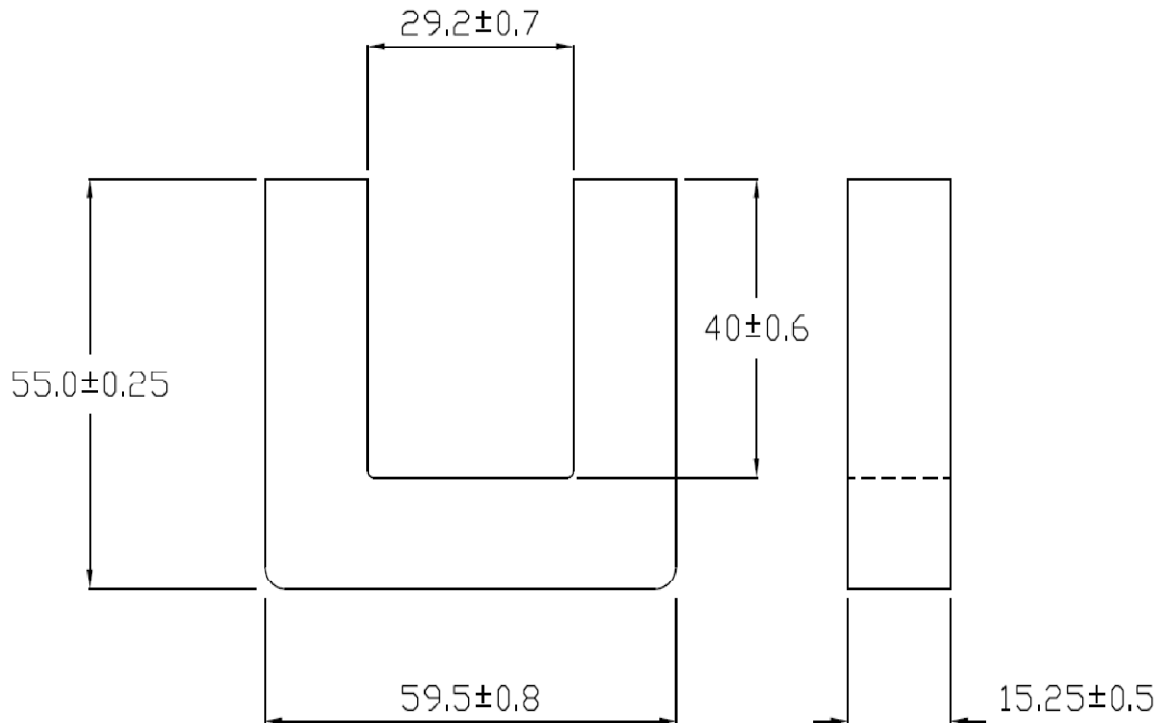

General Terms & Conditions



Checked By: A.K.
Approved By: B.S.
Authorized By: KSR
Date: 28-11-2019
Rev. No.: 01

Customer's Approval
Authorized Signatory:
Name:
Date:

General Terms & Conditions



Semic Trade, s.r.o., Volutová 2521/18, 158 00 Praha 5
Telephone: +420 251 625 331, 251 625 332, 251 625 377
GSM: +420 605 999 994 Fax: +420 251 626 252



www.semic.cz
semic@semic.cz