


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 80.6mm
- Effective Area (A_e): 308.4mm²
- Effective Area (A_{Min}): 308.4mm²
- Effective Volume (V_e): 24857mm³

Approximate weight (without Gap): 120g/Set


“Clamping force for AL measurement is 40±20N, Unless otherwise stated.

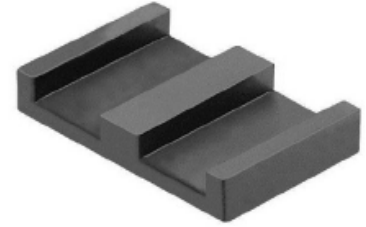

EE5811P Un-gapped (OL)

Test Conditions: 1KHz/1mT/CFR COIL, N=10/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	μ_e Approx./Set	P_v (W/set)	P_v (W/set)	Ordering code
CF292	1800 ±20%	6700 +30%/-20%	≈1395	≤3.73(100mT, 100kHz, 100°C)	≤16.2(200mT, 100kHz, 100°C)	CF292EE5811P OL

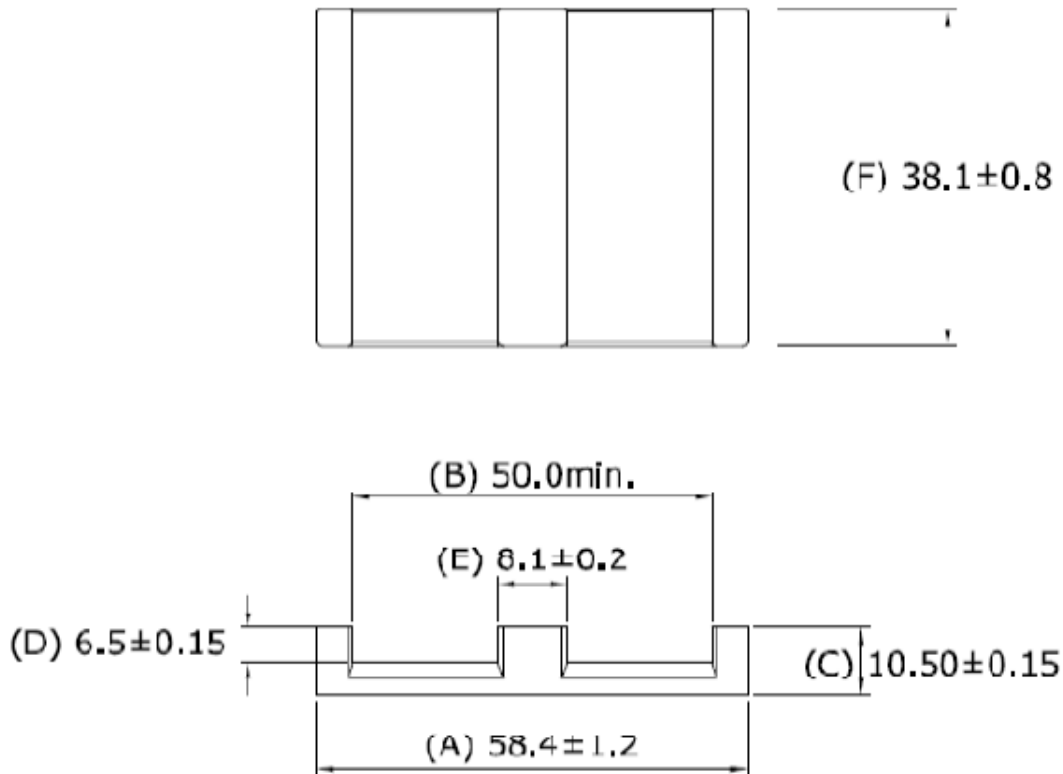

General Terms & Conditions



Checked By: A.K.
Approved By: B.S.
Authorized By: KSR
Date: 12-03-2015 (ISSUE NO.1)

Customer's Approval
Authorized Signatory:
Name:
Date:

General Terms & Conditions

