


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 30.0mm
- Effective Area (A_e): 85.7mm²
- Effective Area (A_{Min}): 83.9mm²
- Effective Volume (V_e): 2571mm³


Approximate weight (without Gap): 14g/Set

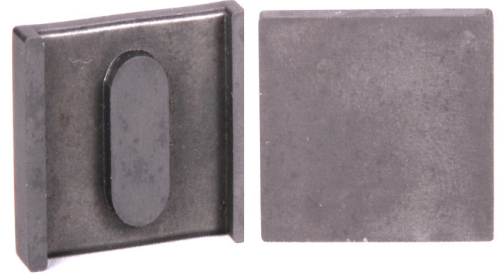

EIH2506 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=10/Lo=2.38uH/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)/Set	P_V (W/set)	Ordering code
CF139	2100 \pm 20%	5300 +30%/-20%	≤ 0.26 (100mT,100kHz,100°C)	CF139 EIH2506 OL

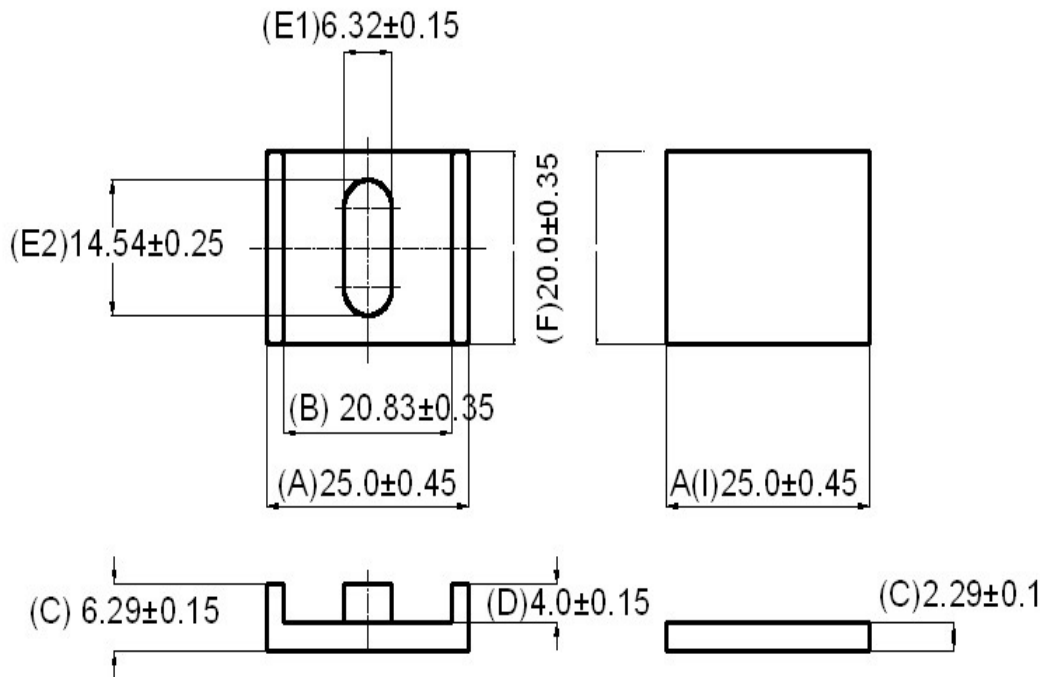

For Cosmo Ferrites Limited-INDIA

Checked By: A.K.

Approved By: B.S.

Authorized By: KSR

Date: 25-02-2014(ISSUE NO.1)

Customer's Approval

Authorized Signatory:

Name:

Date:



Semic Trade, s.r.o.
Volutová 2521/18
158 00 Praha 5
Czech Republic

www.semic.cz

semic@semic.cz

tel.: +420 251 625 331, 332, 377

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf