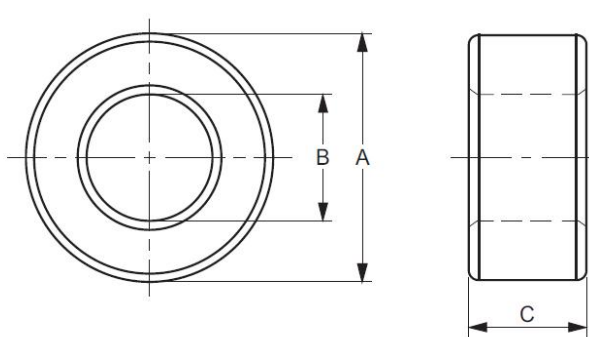


Lj T 2510C - GH12A

		DIMENSIONS (mm)		
		Before Coating		
	A	25.0 ± 0.4		
	B	15.0 ± 0.4		
	C	10.0 ± 0.3		
			After Coating	
	A	26.0 Max		
	B	14.0 Min		
C	11.0 Max			

EFFECTIVE CORE PARAMETERS				
Cl (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	Weight (g/pcs)
1.25	62.8	50	3140	≈ 14.8

ITEM	SPEC	Test Coil	Test Condition	Equipment
AL	$12000\text{nH}/N^2 \pm 30\%$	$\phi 0.35 \times 1T_s$	1KHz, 0.25V $25 \pm 3^\circ\text{C}$	CH3302 or Equal

GDBZ20191007323V1.0

