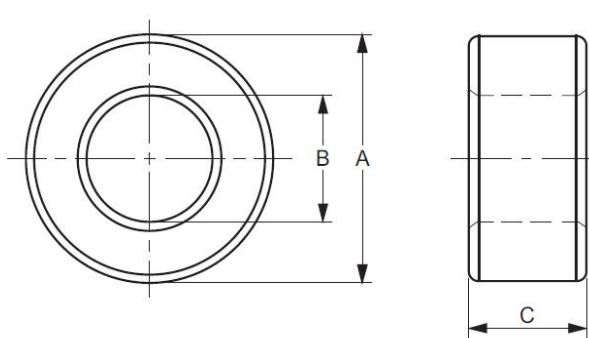


Lj T 2508C - GH 5

	DIMENSIONS (mm)	
		Before Coating
	A	25.0 ± 0.4
	B	15.0 ± 0.4
	C	8.0 ± 0.3
		After Coating
	A	26.0max
	B	14.0min
C	9.0max	

EFFECTIVE CORE PARAMETERS				
C1 (mm ⁻¹)	Le (mm)	Ae (mm ²)	Ve (mm ³)	Weight (g/pcs)
1.54	60.18	39.14	2355.5	≈ 12.06

ITEM	SPEC	Test Coil	Test Condition	Equipment
AL	$4400\text{nH}/N^2 \pm 30\%$	$\phi 0.35 \times 1T_s$	1KHz, 0.25V $25 \pm 3^\circ\text{C}$	CH3302 or Equal

GDBZ20201127509

