


Lj T 2206C - GH 6

	DIMENSIONS (mm)	
		Before Coating
	A	22.0 ± 0.5
	B	14.0 ± 0.3
	C	6.0 ± 0.3
		After Coating
	A	23.0 Max
	B	13.0 Min
	C	7.0 Max

EFFECTIVE CORE PARAMETERS				
Cl (mm ⁻¹)	Le (mm)	Ae (mm ⁻²)	Ve (mm ³)	Weight (g/pcs)
2.31	54.66	23.59	1289	≈ 6.5

ITEM	SPEC	Test Coil	Test Condition	Equipment
AL	$3200\text{nH}/\text{N}^2 \pm 25\%$	$\phi 0.35 \times 1\text{T}_s$	1KHz, 0.25V $25 \pm 3^\circ\text{C}$	CH3302 or Equal

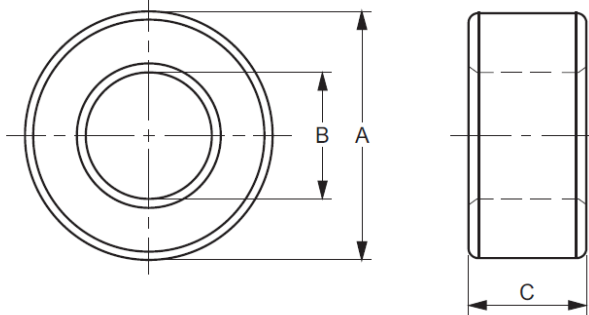