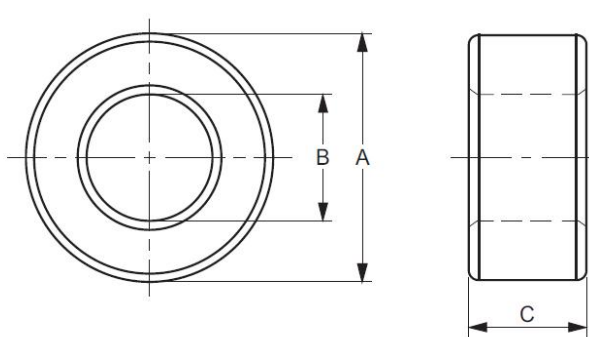


## Lj T 2010C - GP44

	DIMENSIONS (mm)	
	Before Coating	
	A	$20.0 \pm 0.4$
	B	$10.0 \pm 0.3$
	C	$10.0 \pm 0.3$
	After Coating	
	A	21.0 Max
	B	9.0 Min
	C	11.0 Max

EFFECTIVE CORE PARAMETERS				
C1 (mm <sup>-1</sup> )	Le (mm)	Ae (mm <sup>2</sup> )	Ve (mm <sup>3</sup> )	Weight (g/pcs)
0.94	47.1	50	2355	≈ 11.5

ITEM	SPEC	Test Coil	Test Condition	Equipment
AL	$3000\text{nH}/\text{N}^2 \pm 25\%$	$\phi 0.35 \times 1\text{T}_s$	1KHz, 0.25V $25 \pm 3^\circ\text{C}$	CH3302 or Equal

GDBZ20201215515

