


Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)


- Effective Length (L_e): mm
- Effective Area (A_e): mm²
- Effective Area (A_{Min}): mm²
- Effective Volume (V_e): mm³

Approximate weight: 309 g/pc



I6540 (OL)

Material Grade	Initial Permeability (μ_{iac})	Ordering code
CF292	1800 \pm 20%	CF292 I6540 OL
CF139	2100 \pm 20%	CF139 I6540 OL
CF297	2300 \pm 20%	CF297 I6540 OL
CF295	3000 \pm 20%	CF295 I6540 OL

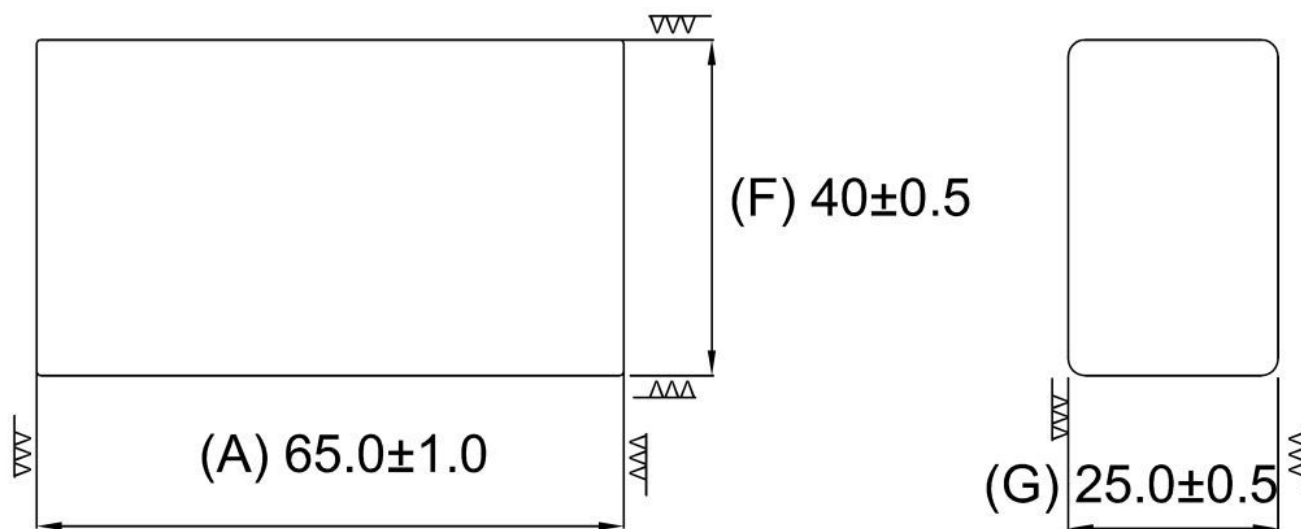

Note : All Sides Grinding

For Cosmo Ferrites Limited-INDIA

Checked By: A.K.

Approved By: B.S.

Authorized By: KSR

Date: 04-10-2014 (ISSUE NO.1)

Customer's Approval

Authorized Signatory:

Name:

Date:



SEMIC TRADE, s.r.o.

Volutová 2521/18

158 00 Praha 5

Czech Republic

www.semic.cz

semic@semic.cz

tel.: +420 251 625 331, 332, 377

fax: +420 251 626 252, 393

For general terms and conditions please visit:

http://www.cosmoterrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf