

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, as per IEC standards.
Effective Parameters irrespective of material grade (per set)

Parameter	Value	Unit
Effective Length (L_e):	210.0	mm
Effective Area (A_e):	290.0	mm ²
Effective Area (A_{min}):	276.0	mm ²
Effective Volume (V_e):	61000	mm ³
Approximate weight(m):	310	g/set




“Clamping force for AL measurement is 80 ±20 N, unless otherwise stated”

UUR6440 Un-gapped (OL)

Test Conditions: 1kHz/1mT/CFR COIL, N=100/25°C

Material Grade	Initial Permeability(μ_{iac})	AL Value (nH)	μ_e Approx./Set	P_v (W/set) (25kHz,200mT, 100°C)	P_v (W/set) (100kHz,100mT, 100°C)	Ordering code
CF139	2100±20%	3300+30%/-20%	≈1926	≤ 7.8	≤ 6.1	CF139UUR6440 OL
CF297	2300±20%	3600+30%/-20%	≈2100	≤ 7.5	≤ 5.49	CF297UUR6440 OL

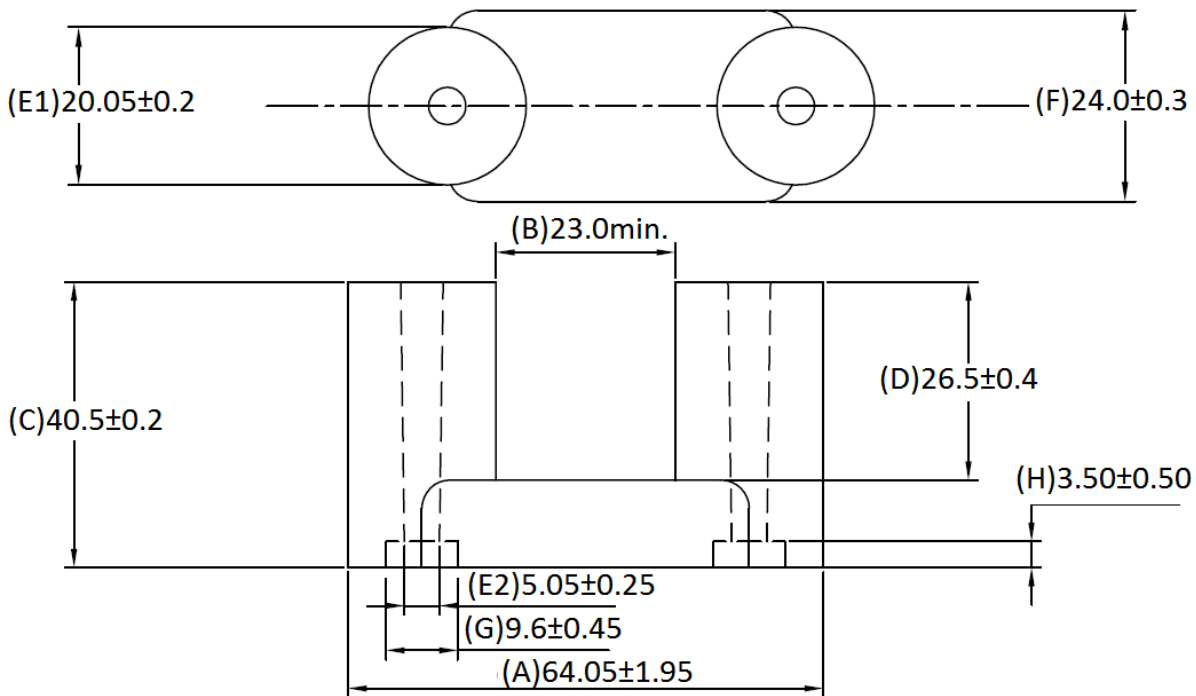

General Terms & Conditions



Checked By: A.K.
Approved By: B.S.
Authorized By: KSR
Date: 04-12-2015
Rev. No.: 02

Customer's Approval
Authorized Signatory:
Name:
Date:

General Terms & Conditions

