

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per set)

- Effective Length (L_e): 141.4mm
- Effective Area (A_e): 113.5mm²
- Effective Area (A_{min}): 111.9mm²
- Effective Volume (V_e): 16049mm³


Approximate weight: 95 g/Set



UU3562 (OL)

Test Conditions: 1kHz/1mT/CFR COIL,N=100/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	μ_e approx.	P_v (W/set)	Ordering code
CF139	2100 \pm 20%	2000 +30%/-20%	\approx 1950	\leq 1.60(100mT,100kHz, 100°C)	CF139UU3562 OL

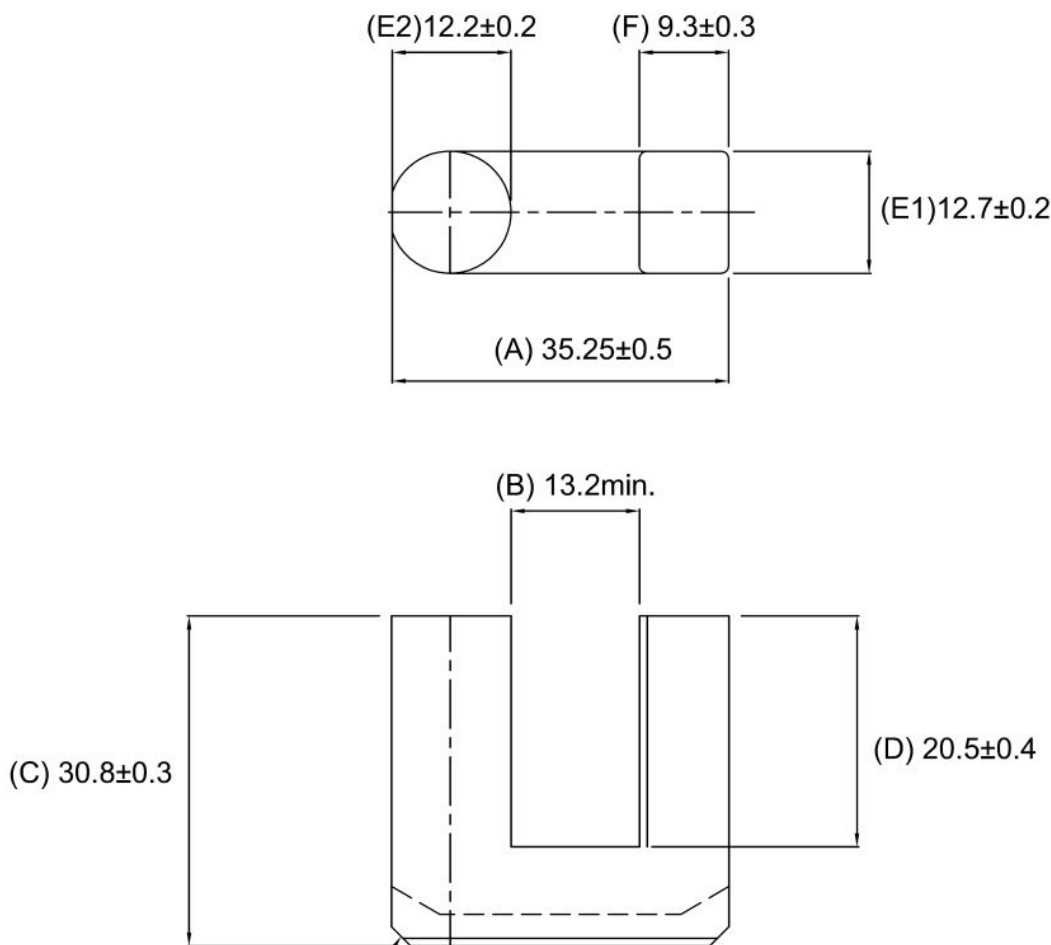

For Cosmo Ferrites Limited-INDIA

Checked By: A.K.

Approved By: B.S.

Authorized By: KSR

Date: 04-12-2014 (ISSUE NO.1)

Customer's Approval

Authorized Signatory:

Name:

Date:



SEMIC TRADE, s.r.o.

Volutová 2521/18

158 00 Praha 5

Czech Republic

www.semic.cz

semic@semic.cz

tel.: +420 251 625 331, 332, 377

fax: +420 251 626 252, 393

For general terms and conditions please visit:

http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf