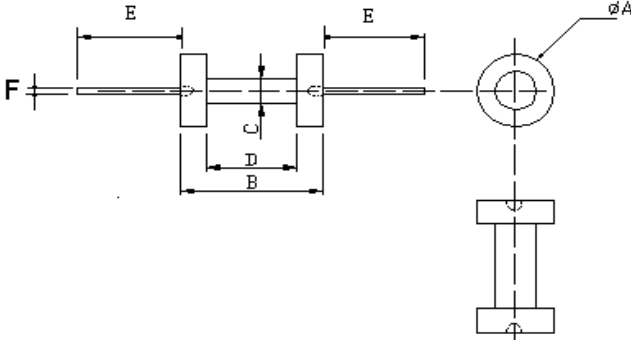


SPECIFICATION FOR APPROVAL

CUSTOMER:		CUST.P/N:
ORDERING CODE:	H6LI DRWW 5x13(3-8)-L	K.C.P/N:
(1) SHAPE : 	A	5.00±0.25 mm
	B	13.0±0.3 mm
	C	3.00±0.15 mm
	D	8.0±0.3 mm
	E	15.0±2.0 mm
	F	0.65Φ±0.05 mm
(2) ELECTRICAL REQUIREMENTS: <p style="text-align: center;">L:10±20%uH(1KHz/0.25v)</p>	(3) TEST CONDITIONS: 1 L:LCR 100 2.WIRE: Φ0.35 2UEW*21.5Ts(REF)	
	(4) PACKING <input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION PCS/BAG* BAGS/INNER BOX BOXES/CARTON = PCS PCS/PLATE* PLATES/CARTON= PCS PCS/TRAY* TRAYS/CARTON= PCS	(5) APPEARANCE (1)AREA OF BREAK : <1.5 mm ² (2)SUM OF BREAKING AREA <2 mm ² (3)DEPTH OF BREAK : <0.8 mm
(6)REMARK:	Approved by	
	Checked by	
	Drawn by 2015/6/29	
	DWG.NO. 20156001A	