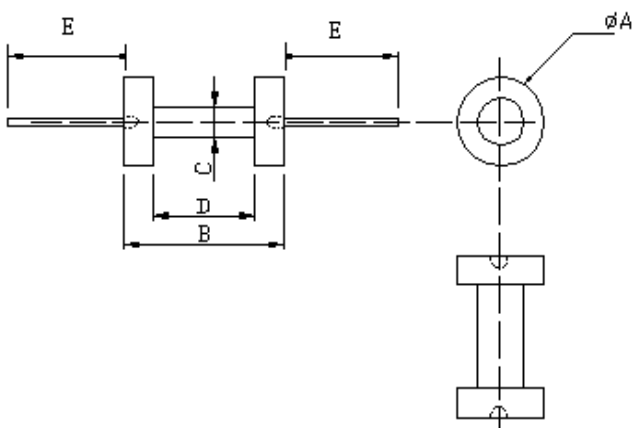


SPECIFICATION FOR APPROVAL

CUSTOMER:		CUST.P/N:	
ORDERING CODE:	K5B DRWW 4x10(2-6.5)-540	K.C.P/N:	
(1) SHAPE : 	A	4.0±0.15 mm	
	B	10.0±0.4 mm	
	C	2.0±0.15 mm	
	D	6.5±0.4 mm	
	E	37.0±2.0(0.5Φ) mm	
(2) ELECTRICAL REQUIREMENTS: <p style="text-align: center;">L:21±20%uH(1KHz/0.25v)</p>	(3) TEST CONDITIONS: 1 L:LCR 100 2.WIRE: Φ0.2 2UEW*35Ts(ref)		
(4) PACKING <input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION PCS/BAG* BAGS/INNER BOX BOXES/CARTON = PCS PCS/PLATE* PLATES/CARTON= PCS PCS/TRAY* TRAYS/CARTON= PCS	(5) APPEARANCE (1)AREA OF BREAK : <2 mm ² (2)SUM OF BREAKING AREA <3 mm ² (3)DEPTH OF BREAK : <1 mm		
(6)REMARK:	Approved by 吴炳勳		
	Checked by 吴明珠		
	Drawn by 陈雯欣 2014/5/5		
	DWG.NO.		