


SPECIFICATION FOR APPROVAL

CUSTOMER:	SEMIC	CUST.P/N:		
ORDERING CODE:	K1C R 4x30	K.C.P/N:		
(1) SHAPE :		A	4.00±0.15	mm
		B	30.0±0.4	mm
(2)ELECTRICAL REQUIREMENTS:		(3) TEST CONDITIONS:		
L:21±20%(1KHz/0.25v)		1 L:CH 100 LCR		
		2.WIRE: ϕ 0.5 2UEW*30Ts(ref)		
(4)PACKING		(5) APPEARANCE		
<input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION		(1)AREA OF BREAK : <1 m/m ²		
PCS/BAGS* BAG/INNER BOX* BOXES/CARTON = PCS		(2)SUM OF BREAKING AREA <2 m/m ²		
PCS/PLATE* PLATES/CARTON= PCS		(3)DEPTH OF BREAK : <0.8 m/m		
PCS/TRAY* TRAYS/CARTON= PCS				
(6)REMARK:		Approved by 吳炳勳		
μ i:332±25%		Checked by 吳明珠		
		Drawn by 陳雯欣 2014/7/11		
		DWG.NO. 20147001A		

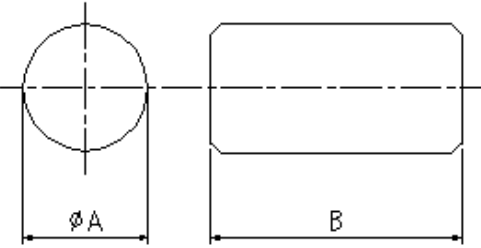

SEMIC TRADE, s.r.o.
 Volutová 2521/18
 158 00 Praha 5
 Czech Republic

www.semic.cz
semic@semic.cz
 tel.: +420 251 625 331, 332, 377
 fax: +420 251 626 252, 393