



SUPER FAST DIODE MODULE TYPE 260A

Features

High Surge Capability
 Type 1200V V_{RRM}
 Isolation Type Package
 Electrically Isolation base plate

HEAVY THREE TOWER KA




Maximum Ratings

Operating Temperature : -55°C to +175°C
 Storage Temperature : -55°C to +175°C



Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MURKA260120AD	1200V	840V	1200V

Dimensions in mm (1 mm = 0.0394")

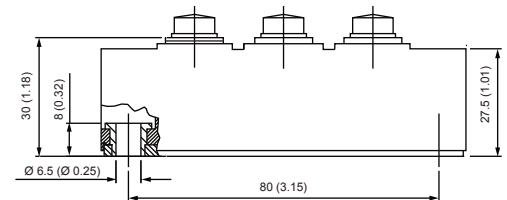

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current (Per leg)	$I_{F(AV)}$	260A	$T_C = 100^\circ\text{C}$
Peak Forward Surge Current (Per leg)	I_{FSM}	6000A	8.3ms, half sine
Maximum Instantaneous Forward Voltage *	V_F	1.69V 1.80V	$I_{FM} = 150\text{A}; T_J = 25^\circ\text{C}$ $I_{FM} = 260\text{A}; T_J = 25^\circ\text{C}$
Maximum Instantaneous Reverse Current At Rated DC Blockig Voltage*	I_R	25 μA 6mA	$T_J = 25^\circ\text{C}$ $T_J = 150^\circ\text{C}$
Maximum Reverse Recovery Time (Per leg)	T_{rr}	260ns	$I_F = 0.5\text{A}, I_R = 1.0\text{A},$ $I_{RR} = 0.25\text{A}$
Isolation Voltage	V_{isol}	3000V	A.C. 1minute
Maximum Thermal Resistance Junction To Case	$R_{\theta jc}$	0.15°C/W 0.30°C/W	Per pkg Per leg

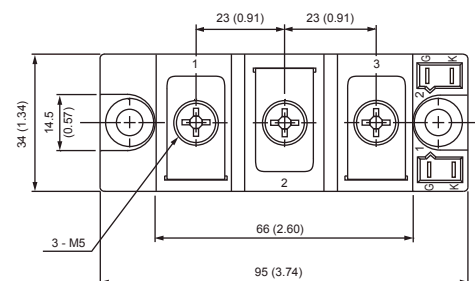

*Pulse Test: Pulse Width 300 μsec , Duty Cycle 2%



Figure .1- Typical Forward Characteristics

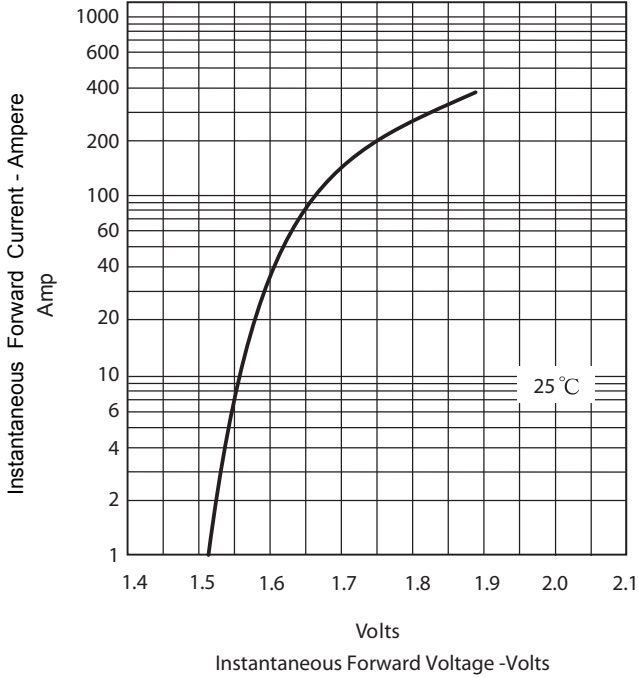


Figure .2- Forward Derating Curve

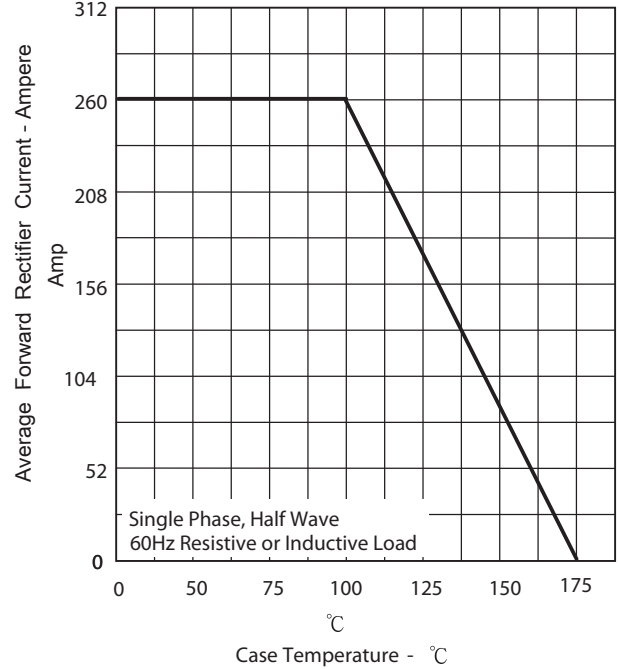


Figure .3- Peak Forward Surge Current

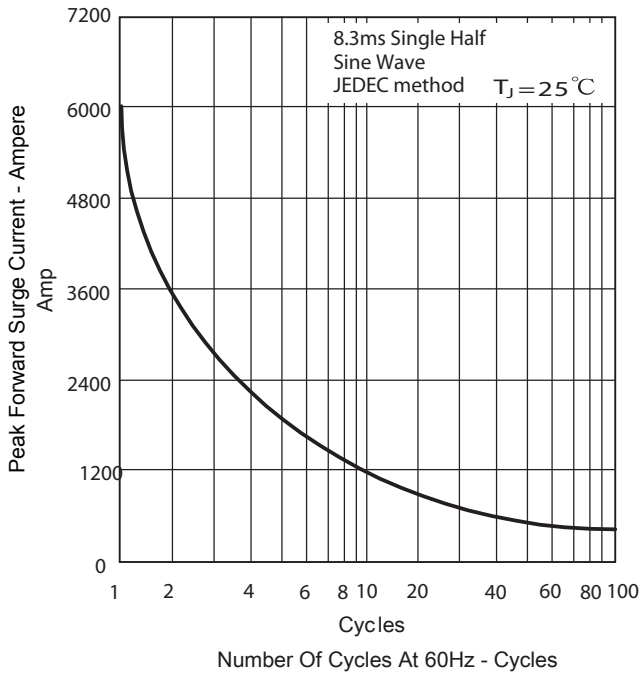


Figure .4 -Typical Reverse Characteristics

