




SEMIC TRADE, s.r.o.
 Volutová 2521/18
 158 00 Praha 5
 Czech Republic

www.semic.cz
 semic@semic.cz
 tel.: +420 251 625 331, 332, 377
 fax: +420 251 626 252, 393


**φ 5.2x20 GLASS TUBE FUSES (SLOW BLOW)
 INNER SOLDERING**



(unit:mm)

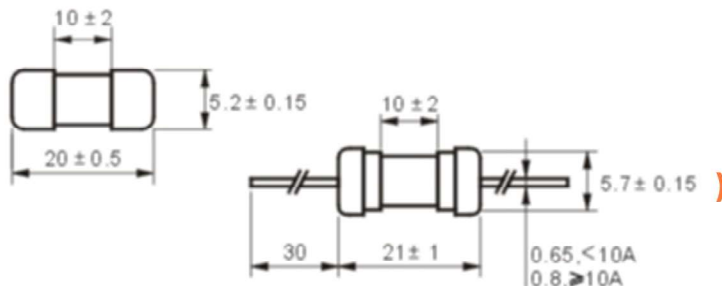

I-T CHARACTERISTICS CURVE

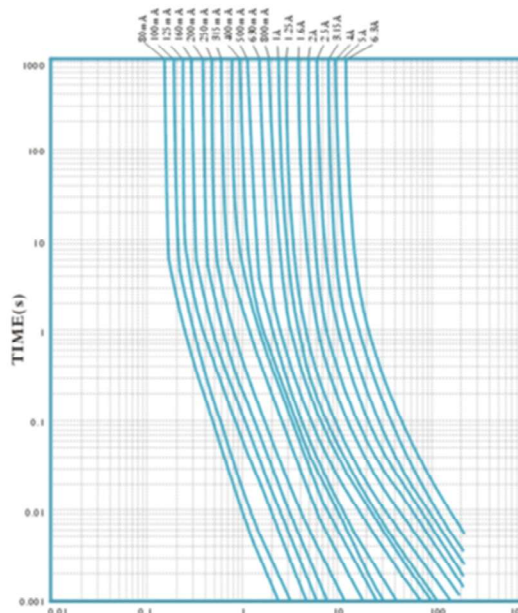

ELECTRICAL CHARACTERISTICS:

RATING	2.1 In		2.75 In		4 In		10 In	
	Max	Min	Max	Min	Max	Min	Max	
Blowing Time	32mA~100mA	2min	200ms	10s	40ms	3s	10ms	300ms
	125mA~6.3A	2min	600ms	10s	150ms	3s	20ms	300ms
	8A~15A	30min	600ms	10s	150ms	3s	20ms	300ms

**INTERRUPTING RATING:
 35A OR 10 In WHICHEVER IS
 GREATER
 CCC/VDE/SEMKO**

RATING

Catalog No.	Ampere Rating	MV Voltage Drop	Voltage Rating	Disjunction Power
1	100mA	2500	H/L	H/L
2	125mA	2000	H/L	H/L
3	150mA	1900	H/L	H/L
4	160mA	1900	H/L	H/L
5	200mA	1500	H/L	H/L
6	250mA	1300	H/L	H/L
7	300mA	1100	H/L	H/L
8	315mA	1100	H/L	H/L
9	350mA	1100	H/L	H/L
10	400mA	1000	H/L	H/L
11	500mA	900	H/L	H/L
12	600mA	300	H/L	H/L
13	700mA	300	H/L	H/L
14	750mA	300	H/L	H/L
15	800mA	250	H/L	H/L
16	1A	150	H/L	H/L
17	1.2A	150	H/L	H/L
18	1.25A	150	H/L	H/L
19	1.5A	150	H/L	H/L
20	1.6A	150	H/L	H/L
21	1.8A	150	H/L	H/L
22	2A	150	H/L	H/L
23	2.5A	120	H/L	H/L
24	3A	100	H/L	H/L
25	3.15A	100	H/L	H/L
26	3.5A	100	H/L	H/L
27	4A	100	H/L	H/L
28	5A	100	H/L	H/L
29	6A	100	H/L	H/L
30	6.3A	100	H/L	H/L
31	7A	90	H/L	H/L
32	8A	90	H/L	H/L
33	10A	90	H/L	H/L
34	12A	90	H/L	H/L
35	15A	90	H/L	H/L

Ampere Voltage:
 H Denotes For 250V
 L Denotes For 125V

Disjunction Power:
 H Denotes For High Disjunction
 L Denotes For Low Disjunction

TOLERANCES UNLESS NOTED OTHERWISE

X
 XX
 XXX

90° FORMED +20°
 ANGLES -1

FIRST ANGLE PROJECTION



DRAWN		MODEL NO.	CUSTOMER		
DESIGN			CUSTOMER NO.		
CHECKED		DWG NO.	VER	1:1	SCALE
APPROVED			UNIT	mm	SHEET
DATE	07/16/25				
CONTRACT NO.					
AGENCY APPROVAL					