


TIP125/TIP126/TIP127 PNP Epitaxial Darlington Transistor

- Medium Power Linear Switching Applications
- Complementary to TIP120/121/122

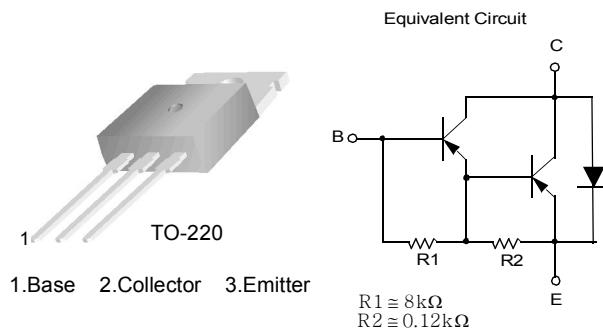

Absolute Maximum Ratings* $T_a = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Units
V_{CBO}	Collector-Base Voltage : TIP125 : TIP126 : TIP127	- 60 - 80 - 100	V
V_{CEO}	Collector-Emitter Voltage : TIP125 : TIP126 : TIP127	- 60 - 80 - 100	V
V_{EBO}	Emitter-Base Voltage	- 5	V
I_C	Collector Current (DC)	- 5	A
I_{CP}	Collector Current (Pulse)	- 8	A
I_B	Base Current (DC)	- 120	mA
P_C	Collector Dissipation ($T_a=25^\circ\text{C}$)	2	W
	Collector Dissipation ($T_C=25^\circ\text{C}$)	65	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature	- 65 ~ 150	$^\circ\text{C}$

* These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Electrical Characteristics* $T_a=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
$V_{CEO(\text{sus})}$	Collector-Emitter Sustaining Voltage : TIP125 : TIP126 : TIP127	$I_C = -100\text{mA}, I_B = 0$	-60 -80 -120			V V V
I_{CEO}	Collector Cut-off Current : TIP125 : TIP126 : TIP127	$V_{CE} = -30\text{V}, I_B = 0$ $V_{CE} = -40\text{V}, I_B = 0$ $V_{CE} = -50\text{V}, I_B = 0$			-2 -2 -2	mA mA mA
I_{CBO}	Collector Cut-off Current : TIP125 : TIP126 : TIP127	$V_{CB} = -60\text{V}, I_E = 0$ $V_{CB} = -80\text{V}, I_E = 0$ $V_{CB} = -100\text{V}, I_E = 0$			-1 -1 -1	mA mA mA
I_{EBO}	Emitter Cut-off Current	$V_{BE} = -5\text{V}, I_C = 0$			-2	mA
h_{FE}	* DC Current Gain	$V_{CE} = -3\text{V}, I_C = 0.5\text{A}$ $V_{CE} = -3\text{V}, I_C = -3\text{A}$	1000 1000			
$V_{CE(\text{sat})}$	* Collector-Emitter Saturation Voltage	$I_C = -3\text{A}, I_B = -12\text{mA}$ $I_C = -5\text{A}, I_B = -20\text{mA}$			-2 -4	V V
$V_{BE(\text{on})}$	* Base-Emitter On Voltage	$V_{CE} = -3\text{V}, I_C = -3\text{A}$			-2.5	V
C_{ob}	Output Capacitance	$V_{CB} = -10\text{V}, I_E = 0, f = 0.1\text{MHz}$			300	pF

* Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

Typical Characteristics

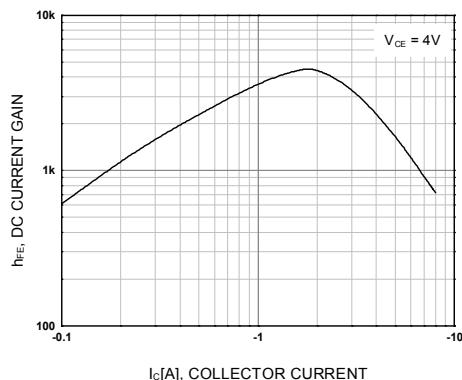
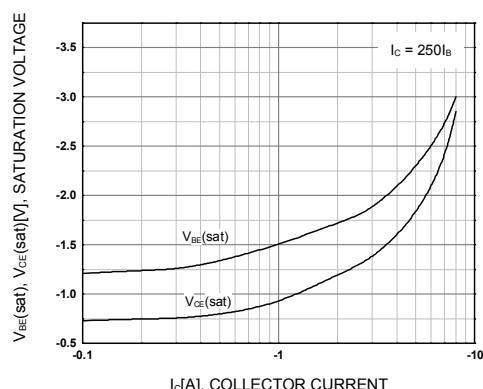
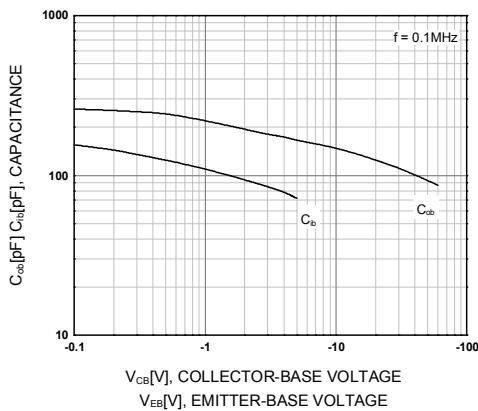


Figure 1. DC current Gain



**Figure 2. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage**



**Figure 3. Output and Input Capacitance
vs. Reverse Voltage**

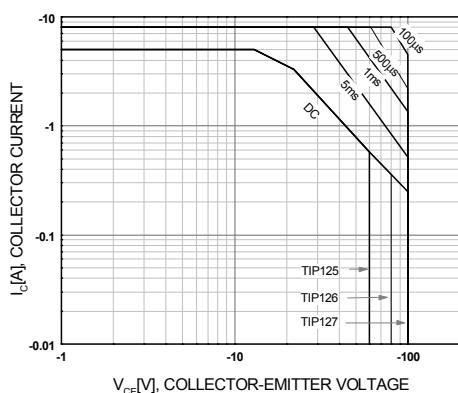


Figure 4. Safe Operating Area

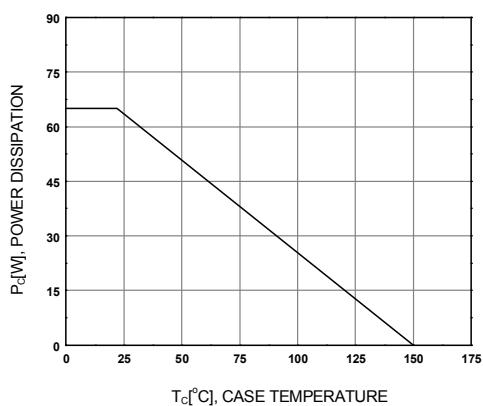


Figure 5. Power Derating

Mechanical Dimensions

TO220

