
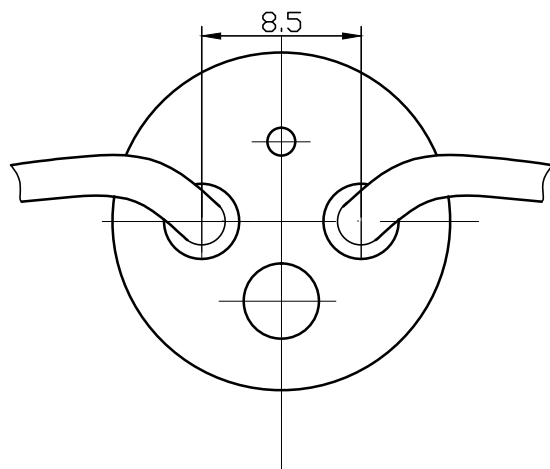


PRODUCT SPECIFICATION

Product Type:	Thermostat
Product Model:	TK24FS
Customer:	

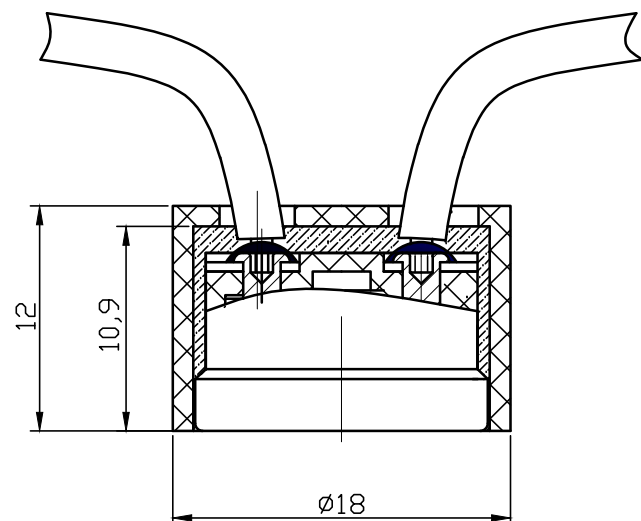

BASIC TECHNICAL DATA

Parameters name	Value
Nominal voltage, V, not more	~250
Nominal current, A, at power coeff. 0.95, not more	16
Nominal current, A, at power coeff. 0.6, not more	10
Switching cycles, at current 16A and power coeff. 0.95, not less than	30000
Switching cycles, at current 10A and power coeff. 0.95, not less than	100000
Response temperature, °C	30
Response temperature tolerance, °C	±2
Reset temperature, °C	25±3
Contact resistance, Ω not more	0.05
Electric strength of insulation, V, not less than	1500
Insulation resistance, MΩ, not less than	50
Degrees of protection provided by enclosure	IP6X
Heating speed, K/min	min- 0,1; max -1,0

Special parameters

Cable cross-section: 0,75mm²; 1mm²

Cable length: 35mm



Semic Trade, s.r.o.
Volutová 2521/18
158 00 Praha 5
Czech Republic

www.semic.cz
www.semic-shop.cz
semic@semic.cz
tel.: +420 251 625 331, 332, 377