

SIDE-LOOK PACKAGE LIGHT EMITTING DIODE


● Features:

1. Selected to specific on-line intensity and radiant intensity ranges.
2. Low cost, plastic side looking package
3. Lens Appearance: Water Clear.
4. This product doesn't contain restriction substance, comply ROHS standard

● Applications:

1. Mouse
2. Automatic Control System.

● Package Dimensions:

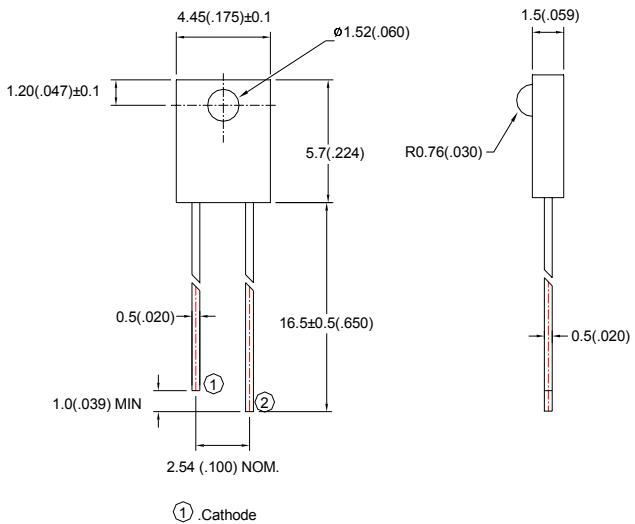

NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (0.01') unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	75	mW
Continuous Forward Current	I _F	50	mA
Peak Forward Current ^{*1}	I _{FP}	1.0	mA
Reverse Voltage	V _R	5	V
Operating Temperature	T _{opr}	-40°C ~ 85°C	-
Storage Temperature	T _{stg}	-45°C ~ 100°C	-
Soldering Temperature	T _{sol}	260°C (for 5 seconds)	-

^{*1} Condition for is I_{FP} pulse of 1/10 duty and 0.1 msec width.

● Optical- Electrical Characteristics (@ $T_A=25^\circ\text{C}$)

Parameter	Symbol	Test Conditions	Min	TYP	Max	Unit
Radiant Intensity	E_e	$I_F=4\text{mA}$	-	0.56	-	mA
Forward Voltage	V_F	$I_F=20\text{mA}$	-	1.2	1.5	V
Reverse Current	I_R	$V_R=5\text{V}$	-	-	100	μA
Peak Wavelength	λ_p	$I_F=20\text{mA}$	-	940	-	nm
Spectral Line Half- Width	$\Delta\lambda$	$I_F=20\text{mA}$	-	50	-	nm
Viewing Angle	$2\theta_{1/2}$	$I_F=20\text{mA}$	-	45	-	deg

● Typical Optical-Electrical Characteristic Curves

FIG.1 Spectral Distribution

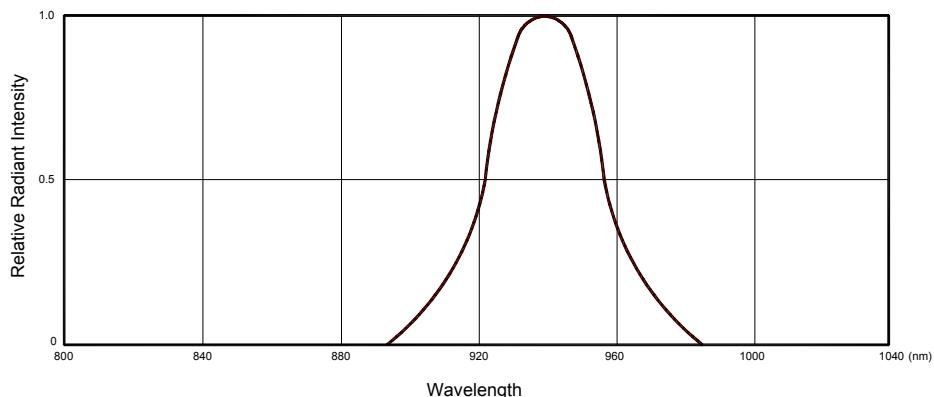


FIG.2 Forward Current Vs. Forward Voltage

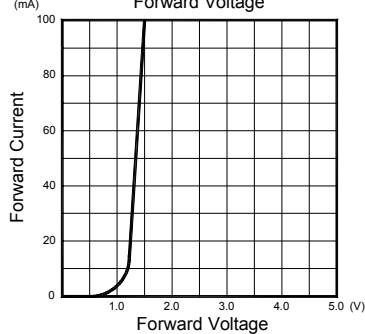


FIG.3 Relative Radiant Intensity Vs. Ambient Temperature

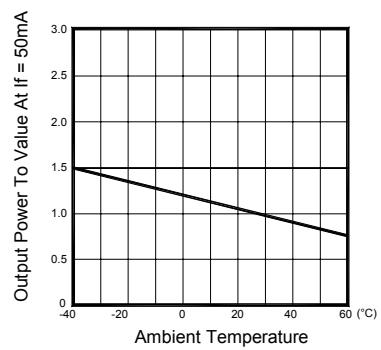


FIG.4 Relative Radiant Intensity Vs. Forward Current



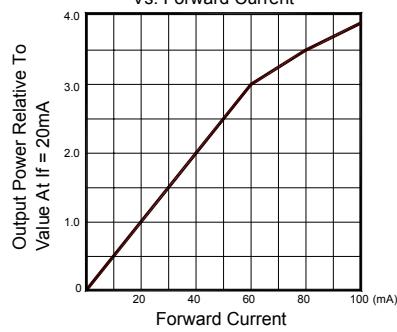



FIG.5 Radiant Diagram

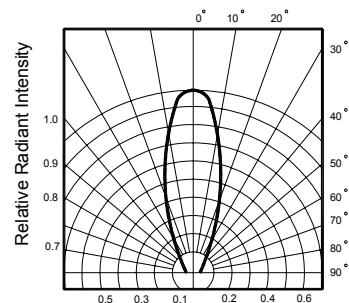

- Tapping and packaging specifications(Units: mm)

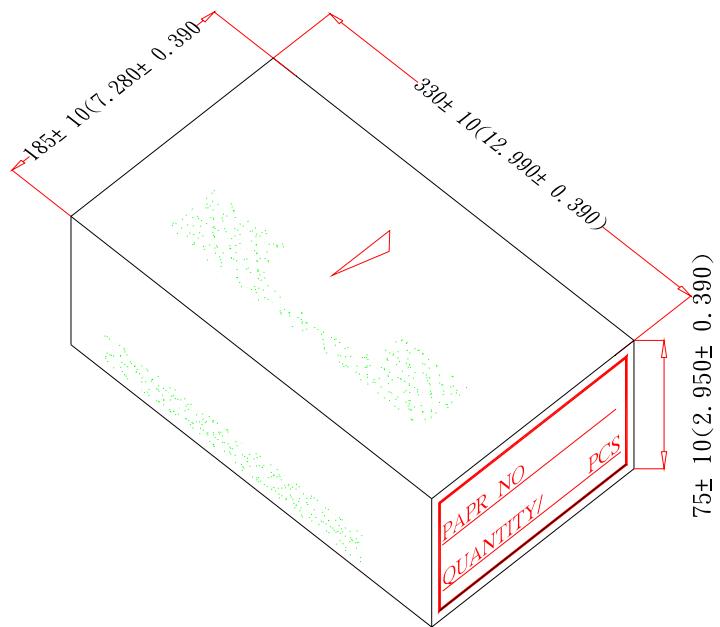

- Packaging Bag Dimensions

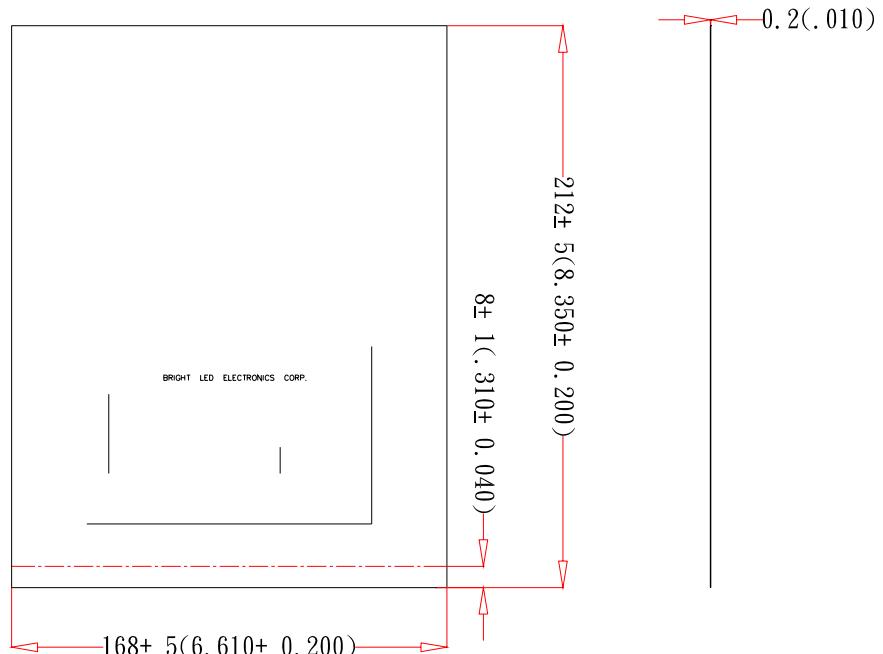

Notes:

- 1、1000pcs per bag, 8Kpcs per box.
- 2、All dimensions are in millimeters(inches).
- 3、Specifications are subject to change without notice.